

Distributed by:




www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.



H21A1, H21A2, H21A3, H21A4, H21A5, H21A6
H22A1, H22A2, H22A3, H22A4, H22A5, H22A6

**1mm APERTURE OPTO-ELECTRONIC SINGLE
CHANNEL SLOTTED INTERRUPTER
SWITCHES WITH TRANSISTOR SENSORS**

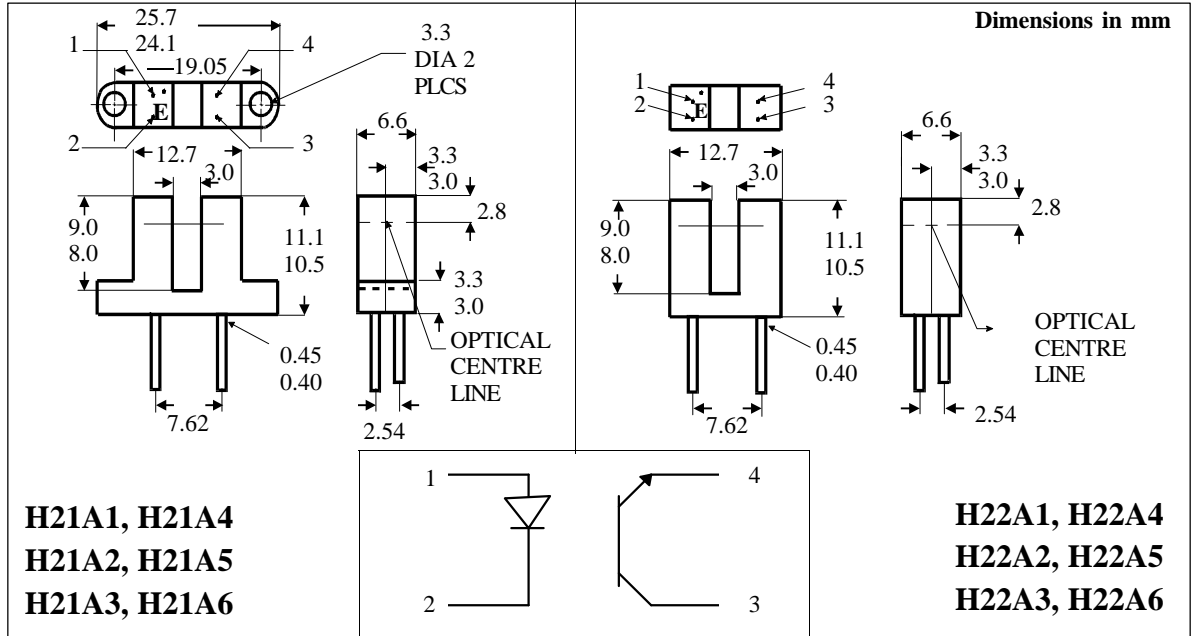

**H21A1, H21A4
H21A2, H21A5
H21A3, H21A6**

**H22A1, H22A4
H22A2, H22A5
H22A3, H22A6**

DESCRIPTION

The H21A_ and H22A_ series of opaque photointerrupters are single channel switches consisting of a Gallium Arsenide infrared emitting diode and a NPN silicon photo transistor mounted in a polycarbonate housing. The package is designed to optimise the mechanical resolution, coupling efficiency, ambient light rejection, cost and reliability. Operating on the principle that objects opaque to infrared will interrupt the transmission of light between an infrared emitting diode and a photo sensor switching the output from an "ON" state to an "OFF" state.

FEATURES

- High Gain
- 3mm Gap between LED and Detector
- Polycarbonate case protected against ambient light

APPLICATIONS

- Copiers, Printers, Facsimilies, Record Players, Cassette Decks, Optoelectronic Switches

**ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)**

Storage Temperature	_____	-40°C to + 85°C
Operating Temperature	_____	-25°C to + 85°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	_____	260°C

INPUT DIODE

Forward Current	_____	50mA
Reverse Voltage	_____	5V
Power Dissipation	_____	75mW

OUTPUT TRANSISTOR


Collector-emitter Voltage BV_{CEO}	_____	55V
H21A4, 5, 6, H22A4, 5, 6	_____	30V
H21A1, 2, 3, H22A1, 2, 3	_____	5V
Emitter-collector Voltage BV_{ECO}	_____	20mA
Collector Current I_C	_____	75mW
Power Dissipation	_____	

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F) Reverse Voltage (V_R) Reverse Current (I_R)	5	1.2	1.7 100	V V μA	$I_F = 50\text{mA}$ $I_R = 100\mu\text{A}$ $V_R = 5\text{V}$
Output	Collector-emitter Breakdown (BV_{CEO}) (Note 1) H21A4, 5, 6, H22A4, 5, 6 H21A1, 2, 3, H22A1, 2, 3 Emitter-collector Breakdown (BV_{ECO}) Collector-emitter Dark Current (I_{CEO})	55 30 5			V V V nA	$I_C = 1\text{mA}$ $I_C = 1\text{mA}$ $I_E = 100\mu\text{A}$ $V_{CE} = 10\text{V}$
Coupled	On-State Collector Current $I_{C(ON)}$ (Note 1) H21A1, 4, H22A1, 4 H21A2, 5, H22A2, 5 H21A3, 6, H22A3, 6 Collector-emitter Saturation Voltage $V_{CE(SAT)}$ H21A2, 3, 5, 6, H22A2, 3, 5, 6 H21A1, 4, H22A1, 4 Turn-on Time t_{on} Turn-off Time t_{off}	0.15 1.0 1.9 0.3 2.0 3.0 0.6 4.0 5.5			mA mA mA mA mA mA mA mA mA V V μs μs	$5\text{mA } I_F, 5\text{V } V_{CE}$ $20\text{mA } I_F, 5\text{V } V_{CE}$ $30\text{mA } I_F, 5\text{V } V_{CE}$ $5\text{mA } I_F, 5\text{V } V_{CE}$ $20\text{mA } I_F, 5\text{V } V_{CE}$ $30\text{mA } I_F, 5\text{V } V_{CE}$ $5\text{mA } I_F, 5\text{V } V_{CE}$ $20\text{mA } I_F, 5\text{V } V_{CE}$ $30\text{mA } I_F, 5\text{V } V_{CE}$ $20\text{mA } I_F, 1.8\text{mA } I_C$ $30\text{mA } I_F, 1.8\text{mA } I_C$ $V_{CC} = 5\text{V},$ $I_F = 30\text{mA}, R_L = 2.5\text{k}\Omega$

Note 1 Special Selections are available on request. Please consult the factory.


Collector Power Dissipation vs. Ambient Temperature

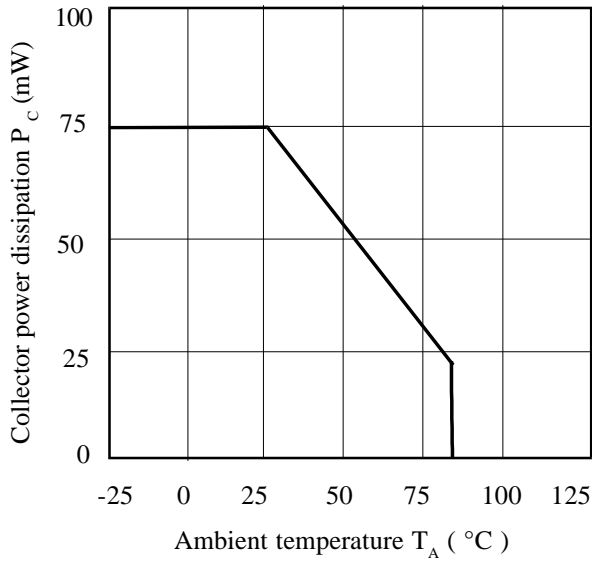


Normalized Output Current vs. Collector-emitter Voltage

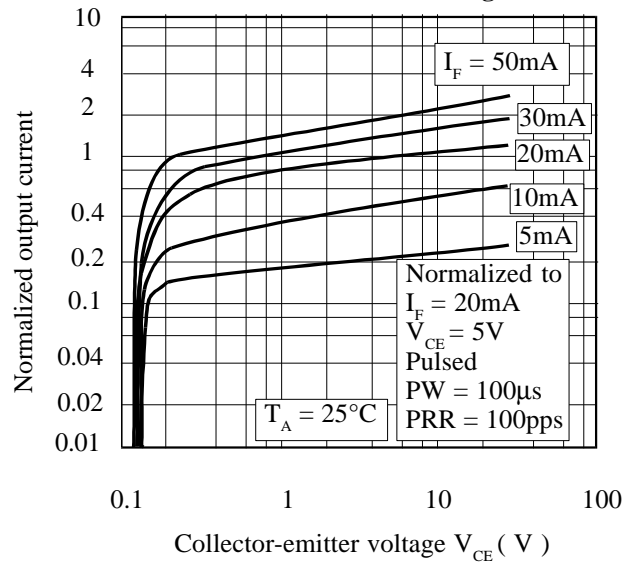


Forward Current vs. Ambient Temperature

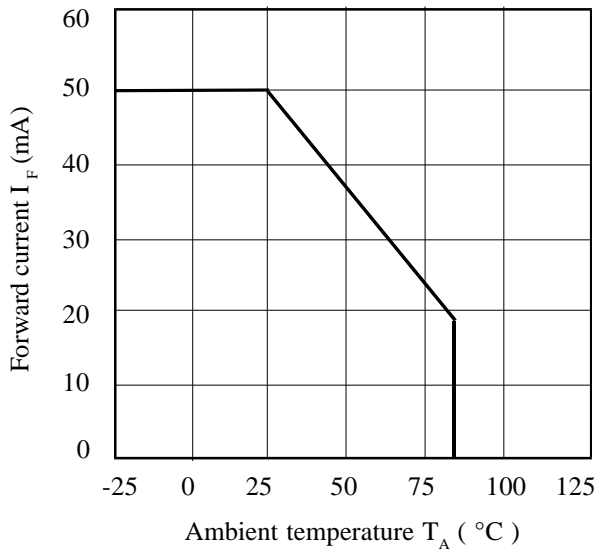

Normalized Output Current vs. Forward Current

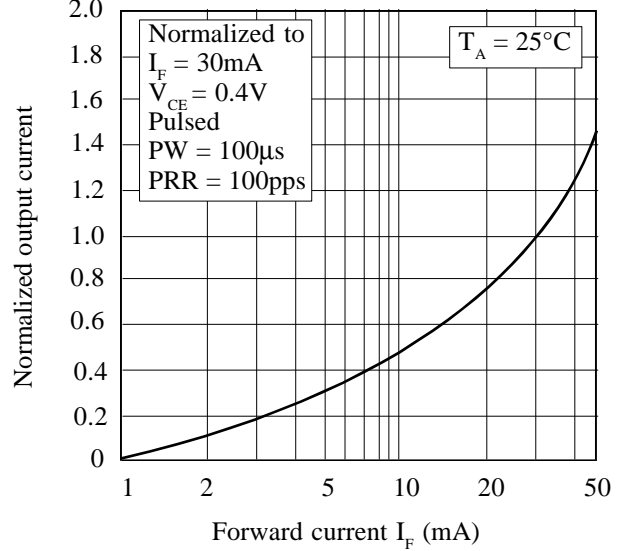

Normalized Output Current vs. Ambient Temperature

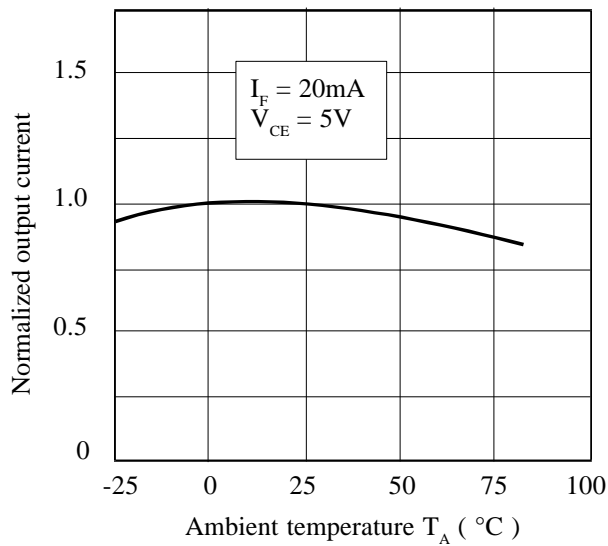

Collector-emitter Saturation Voltage vs. Ambient Temperature

