

Distributed by:




[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 177949

# 1 Amp Schottky Rectifier

## 1N5817, 1N5818, 1N5819

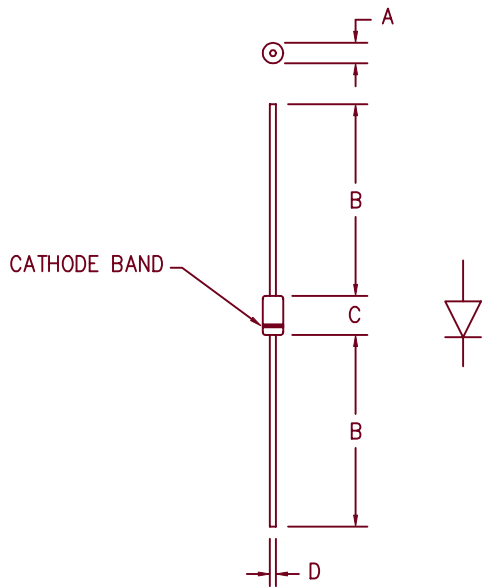

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.081	.107	2.057	2.718	Dia.
B	1.10	---	27.94	---	
C	.160	.205	4.064	5.207	
D	.028	.034	.711	.864	Dia.

PLASTIC D041

Microsemi Catalog Number	Industrial Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
1N5817	VSK120	20V	20V
1N5818	VSK130	30V	30V
1N5819	VSK140	40V	40V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- High Reliability
- High Current Capability

Electrical Characteristics						
		1N5817	1N5818	1N5819		
Average forward current	$I_F(AV)$	1A	1A	1A	$R_{\theta JL} = 15^\circ C/W, L = 1/4"$ 8.3ms, half sine, $T_J = 150^\circ C$ $I_{FM} = 0.1A; T_J = 25^\circ C^*$ $I_{FM} = 1.0A; T_J = 25^\circ C^*$ $I_{FM} = 3.0A; T_J = 25^\circ C^*$ $V_{RRM}, T_J = 25^\circ C$ $V_R = 5.0V, T_J = 25^\circ C$	
Ambient Temperature		135°C	130°C	130°C		
Maximum surge current	$I_{FSM}$	50A	50A	50A		
Max peak forward voltage	$V_{FM}$	.32V	.37V	.37V		
Max peak forward voltage	$V_{FM}$	.45V	.55V	.55V		
Max peak forward voltage	$V_{FM}$	.65V	.85V	.85V		
Max peak reverse current	$I_{RM}$	1mA	1mA	1mA		
Typical junction capacitance	$C_J$	105pF	50pF	50pF		

\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temperature range	$T_{STG}$	-55°C to 150°C
Operating junction temp range	$T_J$	-55°C to 150°C
Maximum thermal resistance	$L = 1/4"$ $R_{\theta JL}$	15°C/W Junction to Lead
Weight		.011 ounces (0.34 grams) typical

5-13-03 Rev. 4

# 1N5817

Figure 1  
Typical Forward Characteristics

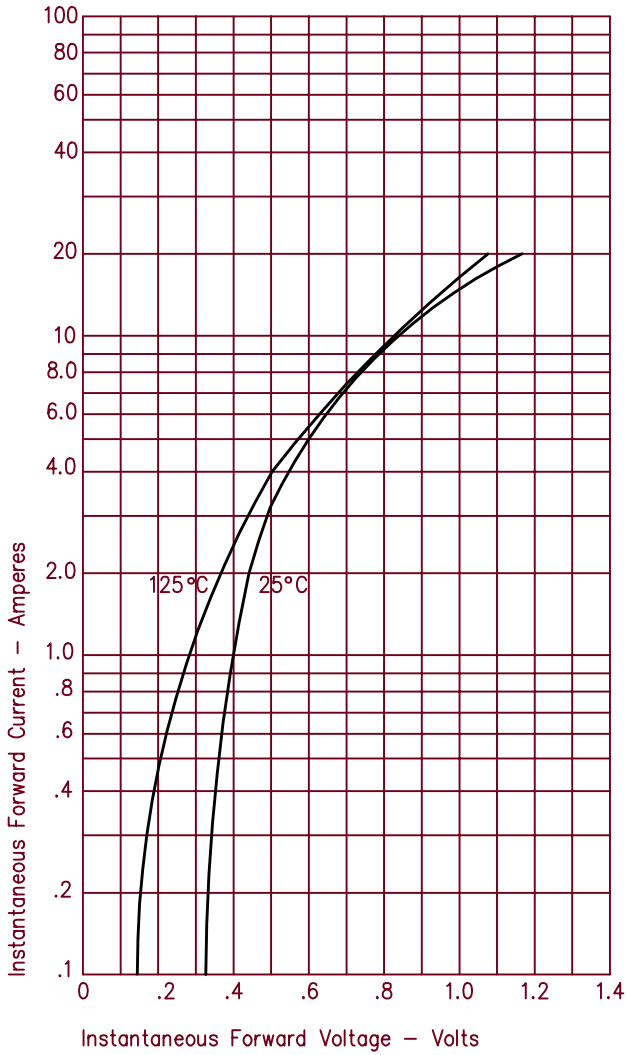


Figure 3  
Typical Junction Capacitance


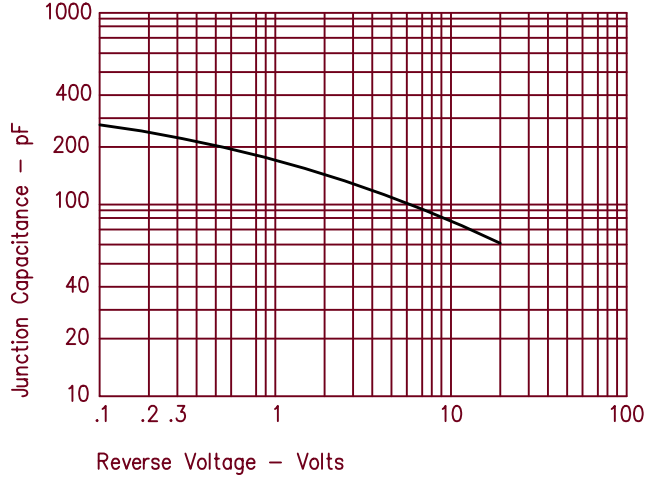


Figure 2  
Typical Reverse Characteristics

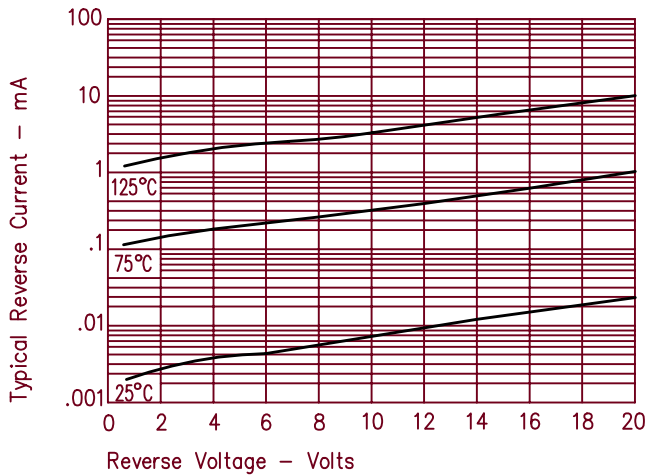

# 1N5818 & 1N5819

Figure 1  
Typical Forward Characteristics

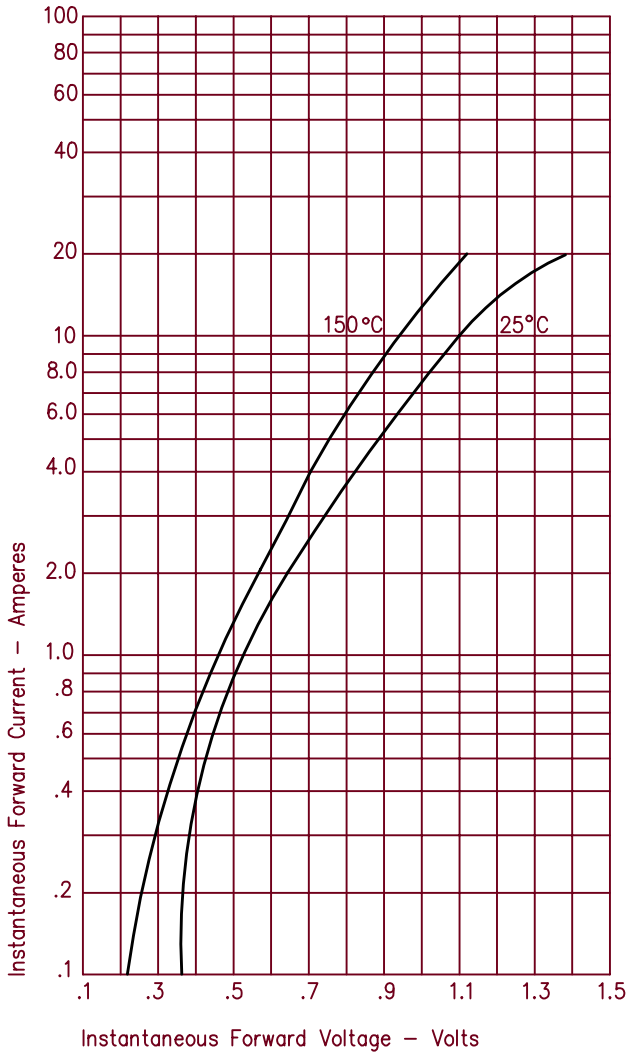


Figure 3  
Typical Junction Capacitance


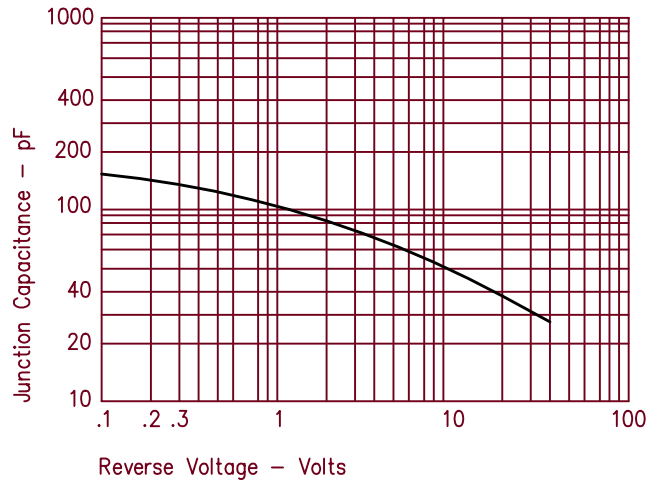


Figure 2  
Typical Reverse Characteristics

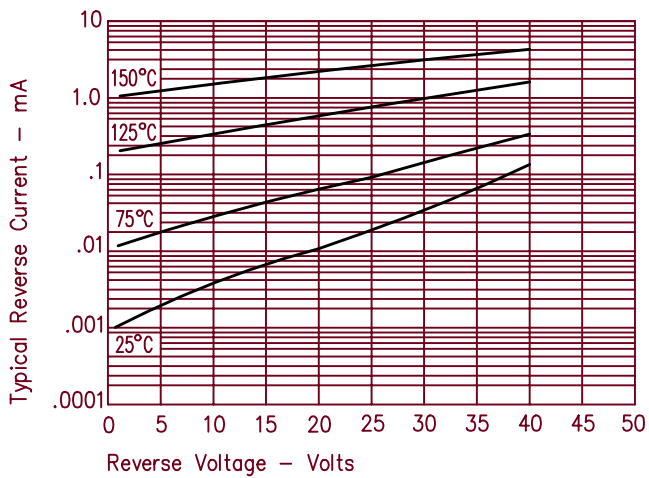

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.