



■ Features

- DIP 1"x1" package with industry standard pinout
- 2:1 wide input range
- Operating temperature range -40 ~ +85°C
- No minimum load required
- Comply to EN55032 radiated Class A without additional components
- High efficiency up to 90%
- Protections: Short circuit (Continuous) / Overload / Over voltage / Input under voltage
- 1.5KVDC I/O isolation
- Remote ON/OFF control and Trimming output ($\pm 10\%$)
- 3 years warranty

■ Applications


- Telecom/datacom system
- Wireless network
- Industrial control facility
- Instrument
- Analyzer
- Detector
- Data switch

■ Description

SKM10 and DKM10 series are 10W isolated and regulated module type DC-DC converter with DIP 1"x1" package. It features international standard pins, a high efficiency up to 90%, wide working temperature range -40~+85°C, 1.5KVDC I/P-O/P isolation voltage, Compliance to EN55032 radiated Class A without additional components, continuous-mode short circuit protection, etc. The models account for different input voltage 4.7~9V, 9~18V, 18~36V and 36~75V 2:1 wide input range, and various output voltage, 3.3V/5V/12V/15V for single output and $\pm 5V/\pm 12V/\pm 15V$ for dual outputs, which are suitable for all kinds of systems, such as industrial control, telecommunication field, distributed power architecture, and so on.

■ Model Encoding

SKM10E-12

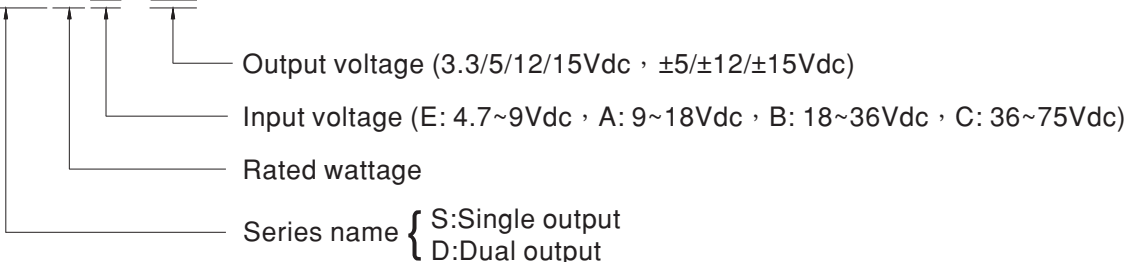



| MODEL SELECTION TABLE | | | | | | | |
|-----------------------|-----------------------|---------------|-----------|----------------|----------------|-------------------|-----------------------|
| ORDER NO. | INPUT | | | OUTPUT | | EFFICIENCY (Typ.) | CAPACITOR LOAD (MAX.) |
| | INPUT VOLTAGE (RANGE) | INPUT CURRENT | | OUTPUT VOLTAGE | OUTPUT CURRENT | | |
| | | NO LOAD | FULL LOAD | | | | |
| SKM10E-03 | 5V (4.7 ~ 9V) | 85mA | 1897mA | 3.3V | 2500mA | 87% | 2470μF |
| SKM10E-05 | | 85mA | 2299mA | 5V | 2000mA | 87% | 2000μF |
| SKM10E-12 | | 30mA | 2298mA | 12V | 833mA | 87% | 940μF |
| SKM10E-15 | | 30mA | 2297mA | 15V | 666mA | 87% | 690μF |
| DKM10E-05 | | 40mA | 2353mA | ±5V | ±0 ~ 1000mA | 85% | *1000μF |
| DKM10E-12 | | 40mA | 2295mA | ±12V | ±0 ~ 416mA | 87% | *440μF |
| DKM10E-15 | | 40mA | 2297mA | ±15V | ±0 ~ 333mA | 87% | *330μF |
| SKM10A-03 | 12V (9 ~ 18V) | 30mA | 855mA | 3.3V | 2500mA | 81% | 2470μF |
| SKM10A-05 | | 30mA | 980mA | 5V | 2000mA | 85% | 2000μF |
| SKM10A-12 | | 35mA | 957mA | 12V | 833mA | 89% | 940μF |
| SKM10A-15 | | 35mA | 956mA | 15V | 666mA | 87% | 690μF |
| DKM10A-05 | | 40mA | 985mA | ±5V | ±0 ~ 1000mA | 85% | *1000μF |
| DKM10A-12 | | 40mA | 957mA | ±12V | ±0 ~ 416mA | 87% | *440μF |
| DKM10A-15 | | 40mA | 957mA | ±15V | ±0 ~ 333mA | 89% | *330μF |
| SKM10B-03 | 24V (18 ~ 36V) | 25mA | 421mA | 3.3V | 2500mA | 82% | 2470μF |
| SKM10B-05 | | 25mA | 490mA | 5V | 2000mA | 85% | 2000μF |
| SKM10B-12 | | 25mA | 478mA | 12V | 833mA | 88% | 940μF |
| SKM10B-15 | | 25mA | 478mA | 15V | 666mA | 88% | 690μF |
| DKM10B-05 | | 25mA | 490mA | ±5V | ±0 ~ 1000mA | 85% | *1000μF |
| DKM10B-12 | | 25mA | 478mA | ±12V | ±0 ~ 416mA | 88% | *440μF |
| DKM10B-15 | | 25mA | 478mA | ±15V | ±0 ~ 333mA | 90% | *330μF |
| SKM10C-03 | 48V (36 ~ 75V) | 15mA | 213mA | 3.3V | 2500mA | 81% | 2470μF |
| SKM10C-05 | | 15mA | 245mA | 5V | 2000mA | 85% | 2000μF |
| SKM10C-12 | | 15mA | 239mA | 12V | 833mA | 89% | 940μF |
| SKM10C-15 | | 15mA | 239mA | 15V | 666mA | 88% | 690μF |
| DKM10C-05 | | 15mA | 246mA | ±5V | ±0 ~ 1000mA | 85% | *1000μF |
| DKM10C-12 | | 15mA | 239mA | ±12V | ±0 ~ 416mA | 86% | *440μF |
| DKM10C-15 | | 15mA | 239mA | ±15V | ±0 ~ 333mA | 89% | *330μF |

* For each output

| SPECIFICATION | | | | |
|---------------------------|--|---|---|---------------------------------|
| INPUT | VOLTAGE RANGE | E: 4.7~9Vdc , A: 9~18Vdc , B: 18~36Vdc , C: 36~75Vdc | | |
| | SURGE VOLTAGE (100ms max.) | 5Vin models : 12Vdc, 12Vin models : 25Vdc, 24Vin models : 50Vdc, 48Vin models : 100Vdc | | |
| | FILTER | Pi type | | |
| | PROTECTION | Fuse recommended. 5Vin models: 5A delay time Type, 12Vin models: 4A delay time Type, 24Vin models: 2A delay time Type, 48Vin models: 1A delay time Type | | |
| | INTERNAL POWER DISSIPATION | 500mW | | |
| OUTPUT | VOLTAGE ACCURACY | ±1.5% | | |
| | RATED POWER | 10W | | |
| | RIPPLE & NOISE <small>Note.2</small> | 50mVp-p | | |
| | LINE REGULATION <small>Note.3</small> | ±0.2% | | |
| | LOAD REGULATION <small>Note.4</small> | Single output models: ±0.2%, Dual output models: ±1% | | |
| | SWITCHING FREQUENCY (Typ.) | 350KHz | | |
| | EXTERNAL TRIM ADJ. RANGE (Typ.) | ±10% (Single output model only) | | |
| PROTECTION | SHORT CIRCUIT | Protection type : Continuous, automatic recovery | | |
| | OVERLOAD | 110 ~ 140% rated output power | | |
| | | Protection type : Recovers automatically after fault condition is removed | | |
| | OVER VOLTAGE | Protection type : Clamp by diode | | |
| | UNDER VOLTAGE LOCKOUT | Start-up voltage | 5Vin: 4.4Vdc, 12Vin: 8.8Vdc, 24Vin: 17Vdc, 48Vin: 34Vdc | |
| Shutdown voltage | | 5Vin: 4.2Vdc, 12Vin: 8Vdc, 24Vin: 16Vdc, 48Vin: 32Vdc | | |
| FUNCTION | REMOTE CONTROL | Power ON: R.C. ~ -Vin >5.5~75Vdc or open circuit ; Power OFF: R.C. ~ -Vin <1.2Vdc or short | | |
| ENVIRONMENT | COOLING | Free-air convection | | |
| | WORKING TEMP. | -40 ~ +85°C (Refer to "Derating Curve") | | |
| | CASE TEMPERATURE | +105°C max. | | |
| | WORKING HUMIDITY | 20% ~ 90% RH non-condensing | | |
| | STORAGE TEMP., HUMIDITY | -55 ~ +125°C, 10 ~ 95% RH non-condensing | | |
| | TEMP. COEFFICIENT | 0.03% / °C (0 ~ 71°C) | | |
| | SOLDERING TEMPERATURE | 1.5mm from case of 1 ~ 3sec./260°C max. | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | |
| SAFETY & EMC (Note.5) | SAFETY STANDARDS | EAC TP TC 004 approved | | |
| | WITHSTAND VOLTAGE | I/P-O/P:1.5KVDC | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH | | |
| | ISOLATION CAPACITANCE (Typ.) | 1000pF | | |
| | EMC EMISSION | Parameter | Standard | Test Level / Note |
| | | Conducted | EN55032(CISPR32) | N/A |
| | | Radiated | EN55032(CISPR32) | Class A |
| | EMC IMMUNITY | Parameter | Standard | Test Level / Note |
| | | ESD | EN61000-4-2 | Level 2, ±8KV air, ±4KV contact |
| | | Radiated Susceptibility | EN61000-4-3 | Level 2, 3V/m |
| | | EFT/Burest | EN61000-4-4 | Level 1, 0.5KV |
| | | Surge | EN61000-4-5 | Level 1, 0.5KV Line-Line |
| | | Conducted | EN61000-4-6 | Level 2, 3V(e.m.f.) |
| Magnetic Field | | EN61000-4-8 | Level 2, 3A/m | |
| OTHERS | MTBF | 1200Khrs MIL-HDBK-217F(25°C) | | |
| | DIMENSION (L*W*H) | 25.4*25.4*10.2mm (1*1*0.4 inch) | | |
| | CASE MATERIAL | Black coated copper with Non-Conductive Base | | |
| | PACKING | 18g | | |
| NOTE | <p>1.All parameters are specified at normal input(E:5Vdc, A:12Vdc, B:24Vdc, C:48Vdc), rated load, 25°C 70% RH ambient.</p> <p>2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µf & 47µf capacitor.</p> <p>3.Line regulation is measured from low line to high line at rated load.</p> <p>4.Load regulation is measured from 10% to 100% rated load.</p> <p>5.The final equipment must be re-confirm that it still meet EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."(as available on http://www.meanwell.com)</p> | | | |

External Output Trimming

In order to trim the voltage up or down one needs to connect the trim resistor either between the trim pin and -Vo for trim-up and between trim pin and +Vo for trim-down. The output voltage trim range is $\pm 10\%$. This is shown in Figures 1 and 2:

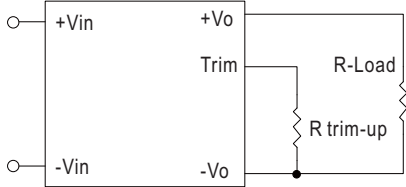


Figure 1. Trim-up Voltage Setup


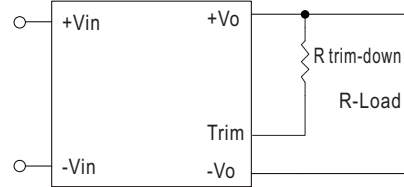


Figure 2. Trim-down Voltage Setup

Mechanical Specification


- All dimensions in mm(inch)
- Tolerance: $x.xx \pm 0.5mm(x.xx \pm 0.02")$
- Pin size is $1 \pm 0.1mm(0.04" \pm 0.004")$

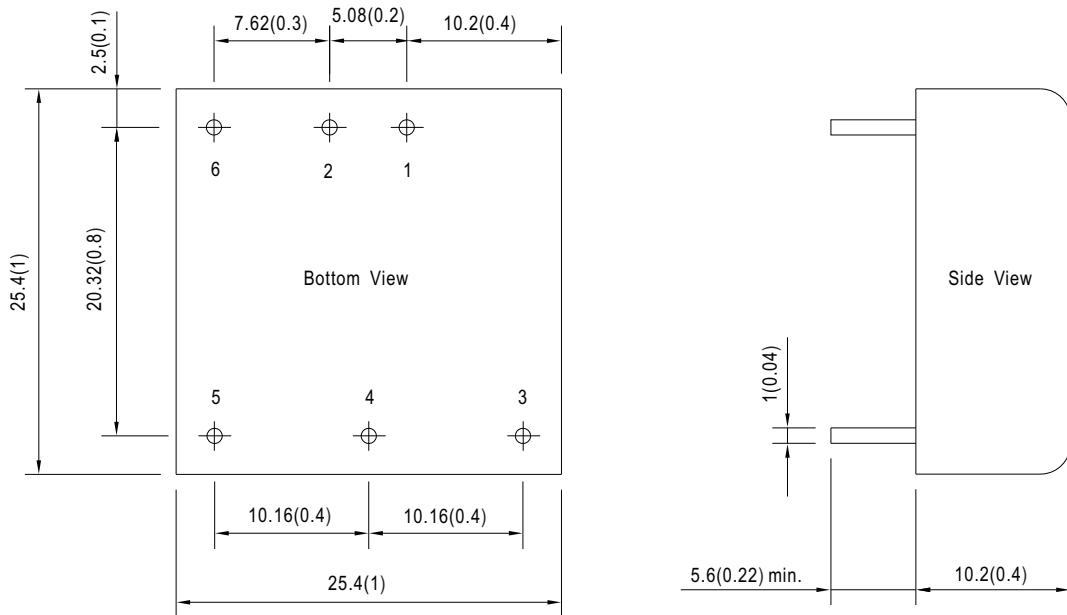

Plug Assignment

| Pin No. | Pin-Out | |
|---------|-----------------------|---------------------|
| | SKM10 (Single output) | DKM10 (Dual output) |
| 1 | +Vin | +Vin |
| 2 | -Vin | -Vin |
| 3 | +Vout | +Vout |
| 4 | Trim | Common |
| 5 | -Vout | -Vout |
| 6 | R.C. | R.C. |

Derating Curve

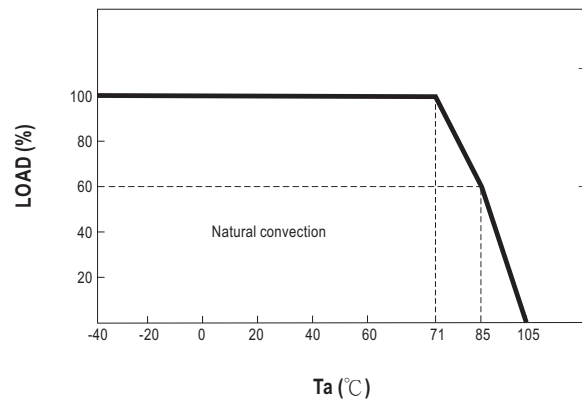

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>