

Distributed by:



**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1873807

# Fiber Optic High Speed PIN Photodiode Type OPF430

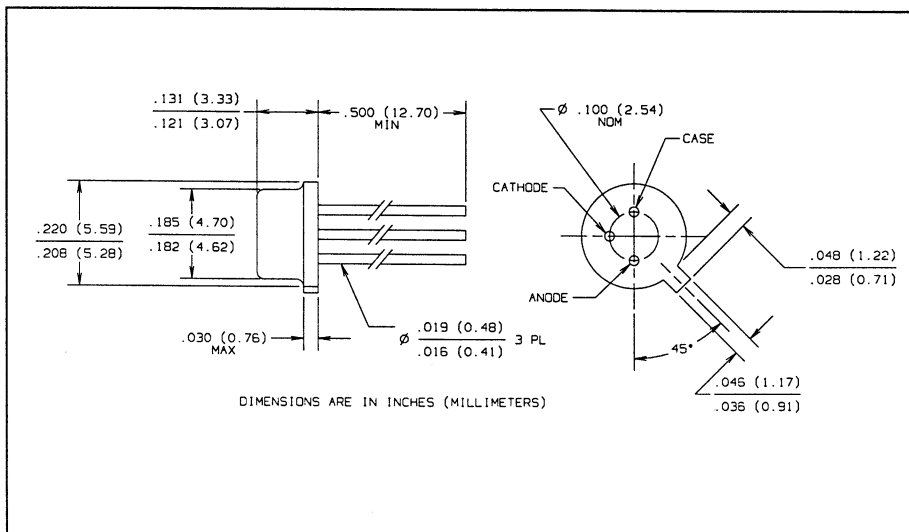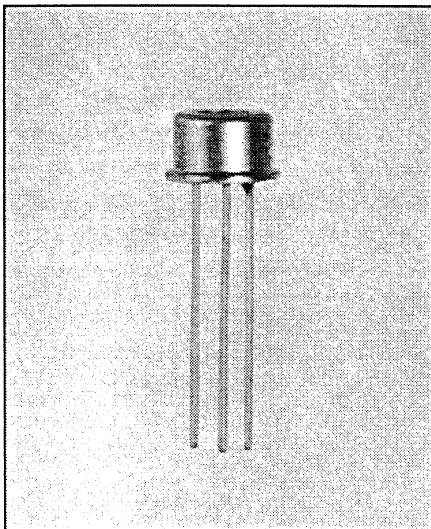

## Features

- Electrically isolated TO-46 package
- High speed, low capacitance
- Optimized for fiber optic applications using 50 to 100 micron fiber

## Description

The OPF430 is a low noise silicon PIN photodiode mounted in a special TO-46 package for fiber optics applications. It offers fast response at low bias and is compatible with LED and laser diode sources in the 800-900 nm wavelength region. Low capacitance improves signal to noise performance in typical short haul LAN applications.

The PIN Photodiodes are designed to interface with multimode optical fibers from 50/125 to 100/140 microns.

## Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Reverse Voltage	100 VDC
Continuous Power Dissipation	200 mW <sup>(1)</sup>
Storage Temperature Range	-65 <sup>o</sup> C to +150 <sup>o</sup> C
Operating Temperature Range	-55 <sup>o</sup> C to +125 <sup>o</sup> C
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering iron]	240 <sup>o</sup> C <sup>(2)</sup>

### Notes:





- (1) Derate linearly @ 2.0 mW/<sup>o</sup> C above 25<sup>o</sup> C.
- (2) RMA flux is recommended. Duration can be extended to 10 sec. max when flow soldering.
- (3) Test @  $V_R = 5\text{ V}$  with 50/125 micron, 0.20 N.A. fiber, @ 10  $\mu\text{W}$  optical power @ 850 nm. Responsivity levels apply to 50  $\mu\text{m}$ , 62.5  $\mu\text{m}$  and 100  $\mu\text{m}$  core optical fibers.

# Type OPF430

Electrical Characteristics ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
R	Flux Responsivity	0.45	0.55		A/W	$V_R = 5.0\text{ V}^{(3)}$
$I_D$	Dark Current		0.1	5.0	nA	$V_R = 5.0\text{ V}$
$\lambda_p$	Peak Response Wavelength		860		nm	
$t_r$	Output Rise Time		0.6		ns	$V_R = 50\text{ V}, R_L = 50\Omega, 10\%-90\%$
$t_r$	Output Rise Time		1.0		ns	$V_R = 15\text{ V}, R_L = 50\Omega, 10\%-90\%$
$t_r$	Output Rise Time		2.0		ns	$V_R = 5.0\text{ V}$
$C_T$	Total Capacitance		1.5	2.0	pF	$V_R = 5.0\text{ V}$
FoV	Field of View		80		Deg.	

## Typical Performance Curves

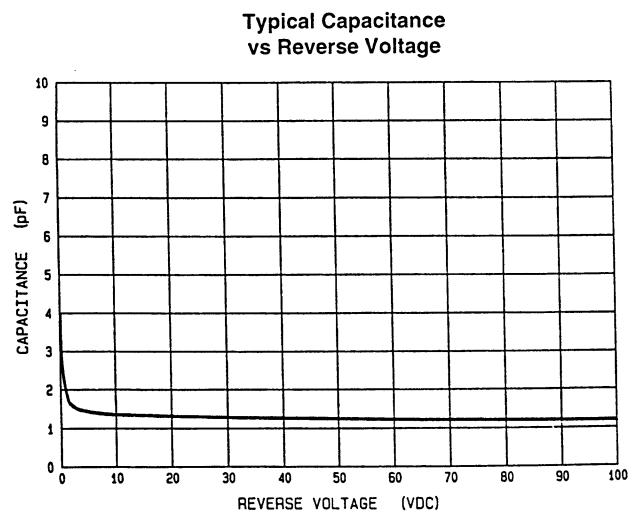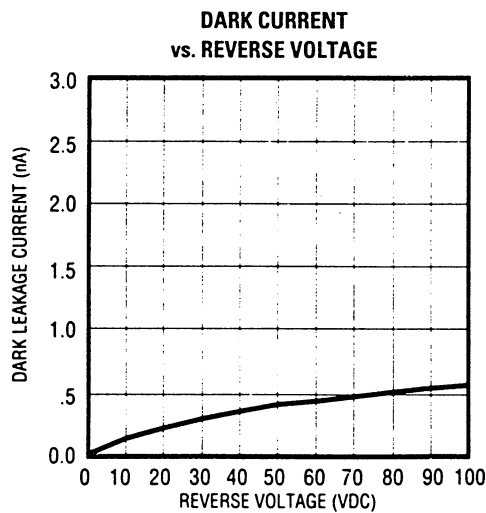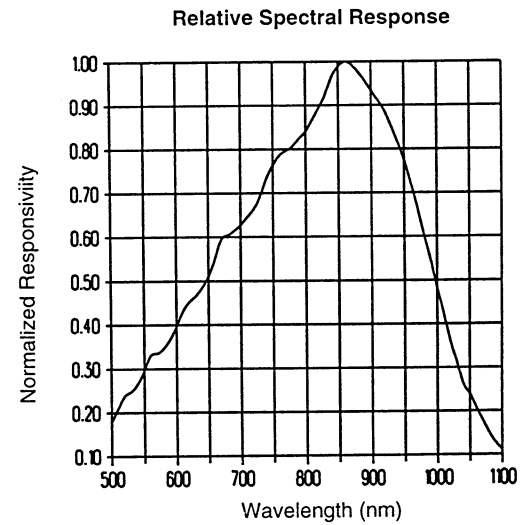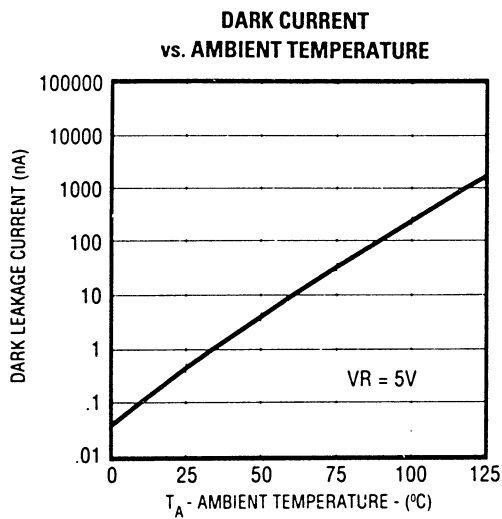

FIBER OPTIC COMPONENTS