Dimensions in mm

MMG52

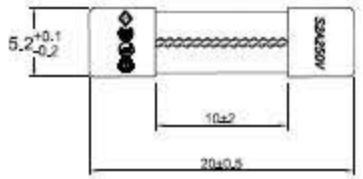

MMG52-PR

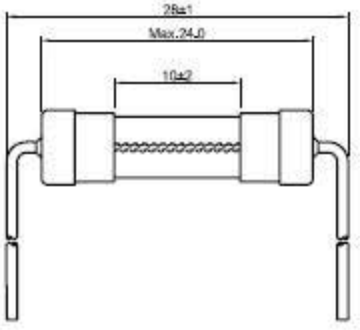

MMG52-PA

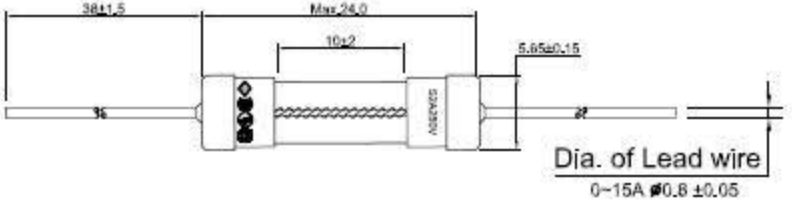

From:0.063~0.8A 125V/250V
From:1A~3.15A 125V/250V
From:3.5~6.3A 125V

Approvals:
Approvals:
Approvals: c UL us LISTED

Rated Current	Breakingcapacity	Rated Voltage
63mA	@125V/AC 10KA @250V/AC 35A	125V/250V
80mA		125V/250V
100mA		125V/250V
125mA		125V/250V
160mA		125V/250V
200mA		125V/250V
250mA		125V/250V
300mA		125V/250V
315mA		125V/250V
400mA		125V/250V
500mA		125V/250V
600mA		125V/250V
630mA		125V/250V
700mA		125V/250V
800mA		125V/250V
1A		125V/250V
1.25A	@125V/AC 10KA @250V/AC 100A	125V/250V
1.5A		125V/250V
1.6A		125V/250V
2A		125V/250V
2.5A		125V/250V
3A		125V/250V
3.15A		125V/250V
3.5A		**125V/250V**
4A	@125V/AC 10KA @250V/AC 200A	125V/250V
5A		125V/250V
6A		125V/250V
6.3A		125V/250V
7A		125V/250V
8A		125V/250V
10A		125V/250V
12A	@32V/AC,DC 1000A	32V
13A		32V
15A		32V
16A		32V
20A		32V
25A		32V
30A		32V

Electrical Characteristic

Rated Current	100%	135%	200%	
In	Min.	Max.	Min.	Max.
100mA-30A	4 h	3600 S	3 S	120 S

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERENCE DECIMALS X ± 0.5 XX ± 0.25 ANGULAR ± 2° DO NOT SCALE DRAWING	CUSTOMER NO.	
	DRAWN BY Paul	TITLE Miniature Cartridge Fuse5.2X20mm Slow Blow Type
	CHECKED BY	
	APPROVED BY 鄭文和	
MATERIAL	DATE 2007.11.19	PART NO. MMG52,MMG52-PA,MMG52-PR
REV A	SCALE	DRAWING NO. AA05012500