



- Features
- 3 stage charging
- AC 115/230VAC selected by switch
- Built-in passive PFC function compliance to EN61000-3-2 Class A (option)
- Protection: Overload / Short circuit / Reverse polarity / Over voltage / Over temperature
- Cooling by free air convection
- Charger for lead-acid batteries
- 2 color LED loading indicator
- Low cost, High reliability
- 2 years warranty




<p>PB - 300/360 P - 12</p> <p>1.300W without FAN 2.360W with FAN</p> <p>P:With Passive PFC N:Without Passive PFC</p>	<p>12:14.4V 24:28.8V 48:57.6V</p>
-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------

SPECIFICATION

MODEL	PB-300□-12	PB-300□-24	PB-300□-48	
OUTPUT	BOOST CHARGE VOLTAGE	14.4V	28.8V	57.6V
	FLOAT CHARGE VOLTAGE	13.6V	27.2V	54.4V
	VOLTAGE ADJUSTABLE RANGE	13 ~ 14.7V	26 ~ 28.8V	52 ~ 58.6V
	RECOMMENDED BATTERY CAPACITY (AMP HOURS)(Note 5)	80 ~ 200Ah	40 ~ 125Ah	20 ~ 65Ah
	BATTERY TYPE	Open & Sealed Lead Acid		
	OUTPUT CURRENT(max.)	20.85A	10.5A	5.3A
	CONTINUOUS OUTPUT CURRENT (Typ.) (Note 6)	12.5A	6.25A	3.2A
INPUT	VOLTAGE RANGE	90 ~ 132VAC / 180 ~ 264VAC selected by switch 248 ~ 370VDC		
	FREQUENCY RANGE	47 ~ 63Hz		
	EFFICIENCY (Typ.)	85%	86%	88%
	POWER FACTOR (Typ.)	>0.65 (with P type) at 230VAC		
	AC CURRENT (Typ.)	6A/115VAC	3A/230VAC	
	INRUSH CURRENT (Typ.)	COLD START 60A		
	LEAKAGE CURRENT	<3.5mA / 240VAC		
PROTECTION	OVERLOAD	90 ~ 110% rated output current Protection type : Constant current limiting, recovers automatically after fault condition is removed		
	SHORT CIRCUIT	O/P Built in fuse (FS100) to protect short circuit condition, shut down o/p voltage and can not re-power on		
	REVERSE POLARITY	By internal fuse		
	OVER VOLTAGE	16 ~ 18V	31 ~ 35V	59 ~ 64V
	OVER TEMPERATURE	Protection type : Automatically derate charge current until zero		
FUNCTION	REMOTE CONTROL (CN5)	Open: Normal work Short: Stop Charging		
ENVIRONMENT	WORKING TEMP.	-10 ~ +50°C (Refer to output load derating curve)		
	WORKING HUMIDITY	20 ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.05%/°C (0 ~ 45°C)		
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes		
SAFETY & EMC (Note 4)	SAFETY STANDARDS	IEC60335-2-29 CB approved by TUV(except for 48V), UL60950-1 approved		
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC	I/P-FG:1.5KVAC	O/P-FG:0.5KVAC
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH		
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B		
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3 (only P type)		
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A		
OTHERS	MTBF	115.8Khrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	253*135*48.5mm(L*W*H)		
	PACKING	1.45Kg; 6pcs/9.7Kg/0.95CUFT		
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</p> <p>5. This is Mean Well's suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.</p> <p>6. Test condition is at 25°C, charging current will change under different temperature.</p>			

Mechanical Specification


Case No.801B Unit:mm

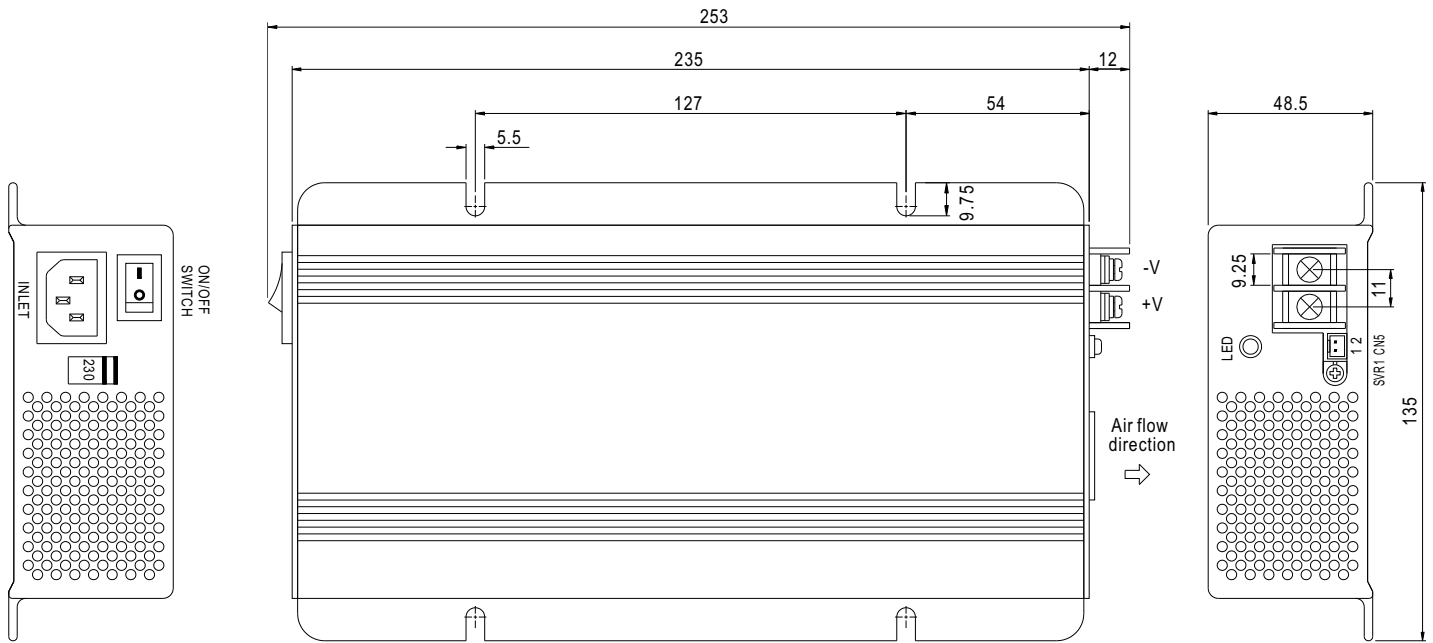


Remote Control(CN5) : JST B2B-XH or equivalent

Assignment	Mating Housing	Terminal
PIN1,2 Open: Normal work	JST XHP or equivalent	JST SXH-001T-P0.6 or equivalent
PIN1,2 Short: Stop Charging		

Block Diagram

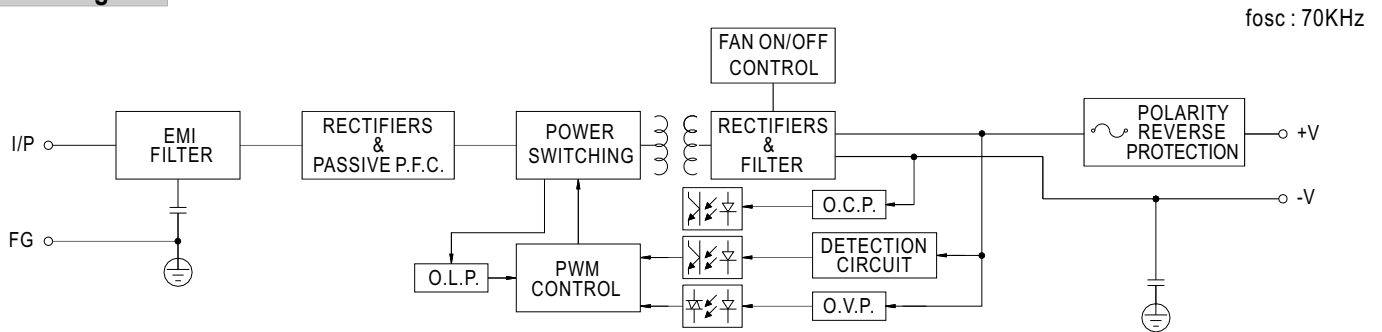


Charging Curve

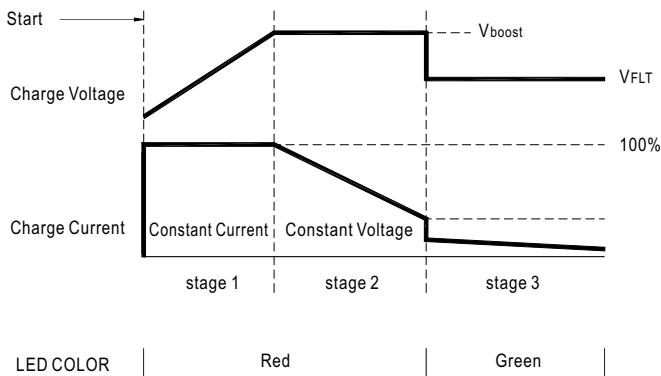

State	PB-300-12	PB-300-24	PB-300-48
Vboost	14.4V	28.8V	57.6V
VFLT	13.6V	27.2V	54.4V

Output Load VS Temperature

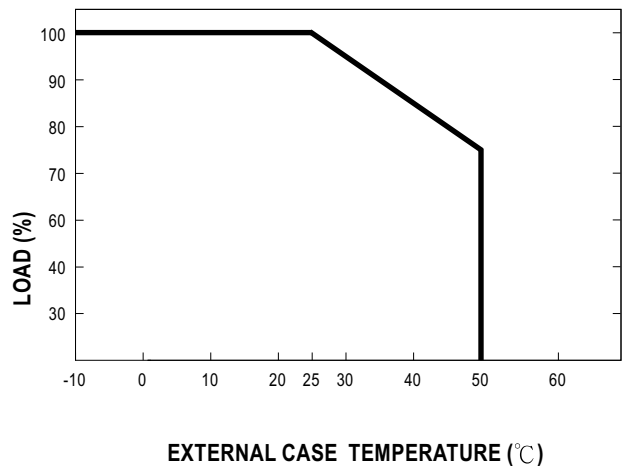



MODEL : PB-300P-24

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	BOOST CHARGE VOLTAGE	28.8V ($\pm 0.3V$)	I/P: 230 VAC I/P: 115 VAC O/P: 90% LOAD Ta: 25°C	28.69 V / 230 VAC 28.69 V / 115 VAC	P
2	FLOAT CHARGE VOLTAGE	27.1V-27.3V	I/P: 230 VAC I/P: 115 VAC O/P: NO LOAD Ta: 25°C	27.23 V / 230 VAC 27.23 V / 115 VAC	P
3	OUTPUT VOLTAGE ADJUST RANGE	CH1: 26V - 28.8V	I/P: 230 VAC I/P: 115 VAC O/P: NO LOAD Ta: 25°C	25.08 V- 30.3 V / 230 VAC 24.98 V- 30 V / 115 VAC	P

INPUT FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	180VAC-264 VAC)	I/P: TESTING O/P: 90% LOAD Ta: 25°C	138 V-264V	P
			I/P: LOW-LINE-3V= 177 V HIGH-LINE+15%=300 V O/P: 90% LOAD /MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK	
2	INPUT FREQUENCY RANGE	47HZ -63 HZ NO DAMAGE OSC	I/P: 180VAC - 264 VAC O/P: 90% LOAD -MIN LOAD Ta: 25°C	TEST: OK	P
3	POWER FACTOR	0.65 / 230 VAC (TYP)	I/P: 230 VAC O/P: 90% LOAD Ta: 25°C	PF= 0.76 / 230 VAC	P
4	EFFICIENCY	86 % (TYP)	I/P: 230 VAC O/P: 90% LOAD Ta: 25°C	88.7 %	P
5	INPUT CURRENT	230V/ 3 A (TYP) 115V/ 6 A(TYP)	I/P: 230 VAC I/P: 115 VAC O/P: 90% LOAD Ta: 25°C	I = 1.8 A / 230 VAC I = 4.6 A / 115 VAC	P
6	INRUSH CURRENT	230V/ 60 A (TYP) COLD START	I/P: 230 VAC O/P: 90% LOAD Ta: 25°C	I = 55 A / 230 VAC	P
7	LEAKAGE CURRENT	< 3.5 mA / 240 VAC	I/P: 254 VAC O/P: Min LOAD Ta: 25°C	L-FG: 1.1 mA N-FG: 1.1 mA	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	90 %- 110 %	I/P: 230 VAC I/P: 115 VAC O/P: TESTING Ta:25°C	100 %/ 230 VAC 100 %/ 115 VAC Constant Current Limiting	P
2	OVER VOLTAGE PROTECTION	CH1: 30V- 35V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta:25°C	33.2 V/ 230 VAC 33.2 V/ 115 VAC Shunt down Re- power ON	P
3	OVER TEMPERATURE PROTECTION	Automatically derate charge current until zero	I/P: 230 VAC O/P: 90% LOAD	O.T.P. Active Automatically derate charge current until zero	P
4	REVERSE POLARITY	BY internal fuse	I/P: 230 VAC Ta:25°C	Fuse open	P

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	FAN ON/OFF CONTROL AND LED TEST	-----	I/P: 230 VAC O/P: TESTING	≤ 0.35 A LED: GREEN ≥ 0.4 A LED: RED	P
2	REMOTE CONTROL (CN5)	OPEN : Normal work Short : Stop charging	I/P: 230 VAC O/P: BAT 190AH Ta:25°C	OPEN : Normal work Short : Stop charging	P

ENVIRONMENT TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	TEMPERATURE RISE TEST	MODEL : PB-300P-12 1. HIGH AMBIENT BURN-IN : 15HRS I/P: 230VAC O/P: BAT 190AH CASE= 30.8 °C 2. HIGH AMBIENT BURN-IN : 7HRS I/P: 264VAC O/P: BAT 190AH CASE = 39.7 °C 3. HIGH AMBIENT BURN-IN : 15HRS I/P: 180VAC O/P: BAT 190AH CASE = 42.5 °C 4. HIGH AMBIENT BURN-IN : 7HRS I/P: 132VAC O/P: BAT 190AH CASE = 31.4 °C 5. HIGH AMBIENT BURN-IN : 17HRS I/P: 90VAC O/P: BAT 190AH CASE = 37 °C			P
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 230 VAC O/P: BAT 190AH CASE= -10 °C	TEST : OK	P
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 25°C NO DAMAGE	I/P: 272 VAC O/P: 90% LOAD Ta= 25°C HUMIDITY= 95 %R.H	TEST : OK	P
4	TEMPERATURE COEFFICIENT	± 0.05 %(0-50°C)	I/P: 230 VAC O/P: BAT 190AH	± 0.02 %(0-50°C)	P
5	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10-500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 1 hour in each axis (X.Y.Z) (6) Ta: 25°C		TEST : OK	P

SAFETY TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 3 KVAC/min I/P-FG: 1.5 KVAC/min O/P-FG: 0.5 KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 1.8 KVAC/min O/P-FG: 0.6 KVAC/min Ta:25°C	I/P-O/P: 11.04 mA I/P-FG: 9.38 mA O/P-FG: 12.89 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 2 GΩ I/P-FG: 3 GΩ O/P-FG: 3 GΩ NO DAMAGE	P
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25°C	11 mΩ	P

E.M.C TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230 VAC/50HZ O/P: 90% LOAD Ta:25°C	PASS	P
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: 90% LOAD /50% LOAD Ta:25°C	PASS Test by certified Lab	P
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: 90% LOAD Ta:25°C	PASS Test by certified Lab	P
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P: 90% LOAD Ta:25°C	CRITERIA A	P
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P: 90% LOAD Ta:25°C	CRITERIA A	P
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N :1KV L,N-PE:2KV	I/P: 230 VAC/50HZ O/P: 90% LOAD Ta:25°C	CRITERIA A	P
7	Test by certified Lab & Test Report Prepare				

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	SUPPOSE C104 IS THE MOST CRITICAL COMPONENT I/P: 230VAC O/P: 90% LOAD CASE= 25 °C LIFE TIME= 1373958 HRS I/P: 230VAC O/P: 75% LOAD CASE= 50 °C LIFE TIME= 307095 HRS			P
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE: 115.8KHRS			P



COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 2 Rated 2SK2850 : 900V 6A	I/P:High-Line +3V = 267 V O/P: (1) 90% LOAD Turn on (2) 90% LOAD (3)Output Short Ta:25°C	(1) 820 V (2) 695 V (3) 810 V	P
2	Diode Peak Voltage	D102 Rated SF20LC30 : 300V 20 A	I/P:High-Line +3V = 267 V O/P: (1) 90% LOAD Turn on (2) 90% LOAD (3)Output Short Ta:25°C	(1) 219 V (2) 214 V (3) 224 V	P
3	Clamp Diode Peak Voltage	D2 Rated SF5408 : 1KV 3A	I/P:High-Line +3V = 267 V O/P: (1) 90% LOAD Ta:25°C	(1) 735 V	P
4	Input Capacitor Voltage	C5 Rated :470 u / 200V/105°C	I/P:High-Line +3V = 267 V O/P: (1) 90% LOAD Turn on /Off (2) Min load Turn on /Off (3) 90% /Min load Change (4)Burn in 1hour Ta:25°C	(1) 160 V (2) 173 V (3) 173 V (4) 160 V	P
5	Control IC Voltage Test	U1 Rated 3845 : 30V	I/P:High-Line +3V = 267 V O/P: (1) 90% LOAD Turn on /Off (2) Min load Turn on /Off (3) 90% /Min load Change Ta:25°C	(1) 19.4 V (2) 19.3 V (3) 19.4 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2005/11/30	RD SMAPLE	PASS	VINCENT TSENG	MAX LIN
2006/6/22	PRODUCT SAMPLE W0604B27	PASS	VINCENT TSENG	MAX LIN
2006/8/11	PRODUCT SAMPLE W0607B40	PASS	VINCENT TSENG	MAX LIN

2003/12/12 A50-F023