





# SPECIFICATION FOR APPROVAL

TO : \_\_\_\_\_

REF. No. \_\_\_\_\_

APPROVED DATE _____ 	CHECKED DATE _____  	PREPARED DATE _____ 
--	--	--

MODEL No. AD0624HB-D71GL P.S. \_\_\_\_\_

DESCRIPTION: DC FAN REV. A

ID No. \_\_\_\_\_


THIS OFFER IS MADE ACCORDING TO YOUR CURRENT INQUIRY.  
UNLESS OTHERWISE REVISED, THIS SPECIFICATION WILL BE FINAL FOR  
ALL FUTURE PRODUCTION OF ORDERS FROM YOUR RESPECTED COMPANY

KINDLY STUDY IN DETAILS AND RETURN TO US THE DUPLICATE DULLY  
SIGNED AS YOUR CONFIRMATION OF SAME.


**ADDA CORPORATION**



BRUSHLESS AXIAL COOLING FANS

Customer :		Ref:
Adda Model No. : AD0624HB-D71GL		
Samples attached : ( ) piece(s),		
Safety Approval : TUV, CE		
Specifications		
=====		
ITEM	SPECIFICATION / CONDITION	
DIMENSIONS	:	60x60x15 MM
BEARING TYPE	:	BALL
RATED VOLTAGE	:	24.0 VDC
OPERATING VOLTAGE RANGE	:	21.6 VDC - 26.4 VDC
START-UP VOLTAGE	:	17.0 VDC, NOMINAL
RATED CURRENT	:	0.090 Amp. + 10% MAX
RATED POWER	:	2.16 Watt.
RATED SPEED	:	4500 RPM ± 10% (IN FREE AIR AT RATED VOLTAGE)
AIR FLOW	:	17.0 CFM (IN FREE AIR AT RATED VOLTAGE)
STATIC AIR PRESSURE	:	0.173 Inch Water (IN FREE AIR AT RATED VOLTAGE)
NOISE LEVEL	:	33.3 dB
MOTOR PROTECTION	:	BY IC
CONNECTION LEAD TYPE	:	WIRE, AWG#26
LIFE EXPECTANCY	:	50000 Hours at 25°C /65%
NET WEIGHT	:	38 Gram.
PACKING	:	300 pcs. per Export Carton.
MEASUREING CONDITION IS 25°C, 65% FOR ABOVE ITEMS.		
		
ADDA CORPORATION	Model No.:AD0624HB-D71GL	Page 1/4



# SPECIFICATION

## 5.0 MECHANICAL INSPECTION

### 5.1 Rotation Direction

Clockwise with label side facing up. The same direction also indicated by an arrow mark on one side of the housing.

### 5.2 Protection

All fans have integrated protection against locked rotor condition so that there will be no damage to winding or any electronic component.

Restarting is automatic as soon as any constraint to rotation has been released.

As fan placed at dead angle position, and the switch was changed from off to on. Restarting was automatic normal as soon as and proved that this fan is good fan.

### 5.3 Locked Rotor Protection

No damage shall be found after 72 hours continuously at condition of rotation locked.

Restarting is automatic as soon as constraint to running has been released.

### 5.4 Avoid the damage, check the correct voltage and proper polarity before connecting with power.

### 5.5 Free Drop Shock

In minimum package condition, the fan should withstand drops on any three faces from a height of 30cm onto a wood board of 10mm thick.

5.6 Please do not stick a grease and/or an oil to the fan housing or blade which may have a harmful influence by a chemical reaction at high humidity.

## 6.0 ELECTRICAL INSPECTION

### 6.1 Insulation Resistance

Not less than 10M ohm between housing and positive end of lead wire (red) at 500V DC.

### 6.2 Dielectric Strength

No damage should be found at 1,500 VAC for 60 seconds, measured with 5mA trip current between housing and positive end of lead wire.

### 6.3 Life Expectancy

The continuous duty life at given temperature after which, 90% of testing units shall still be running.

## 7.0 ENVIRONMENTAL

### 7.1 Operating Temperature / Humidity

-10°C to +70 at humidity 65%+/-20% RH.

### 7.2 Storage Temperature

All function shall be normal after 500 hours storage at -40°C to +70 °C with a 24 hour recovery period at room temperature.

### 7.3 Humidity

After 96 hours, 95% RH, 40+/-2°C per MIL-STD-202F, method 103B humidity test, the measured data on insulation resistance and dielectric strength shall meet the specification.




# SPECIFICATION

## 8.0 REMARKS

- 8.1 Material and construction are subject to change without advance notice. The changes should be within specification.
- 8.2 All fans shall meet the quality inspection under sampling plan MIL-STD-105D as follow:

Critical	0.25%
Major	1.00%
Minor	2.50%

## 9.0 OUTLINE STYLING & DIMENSIONS

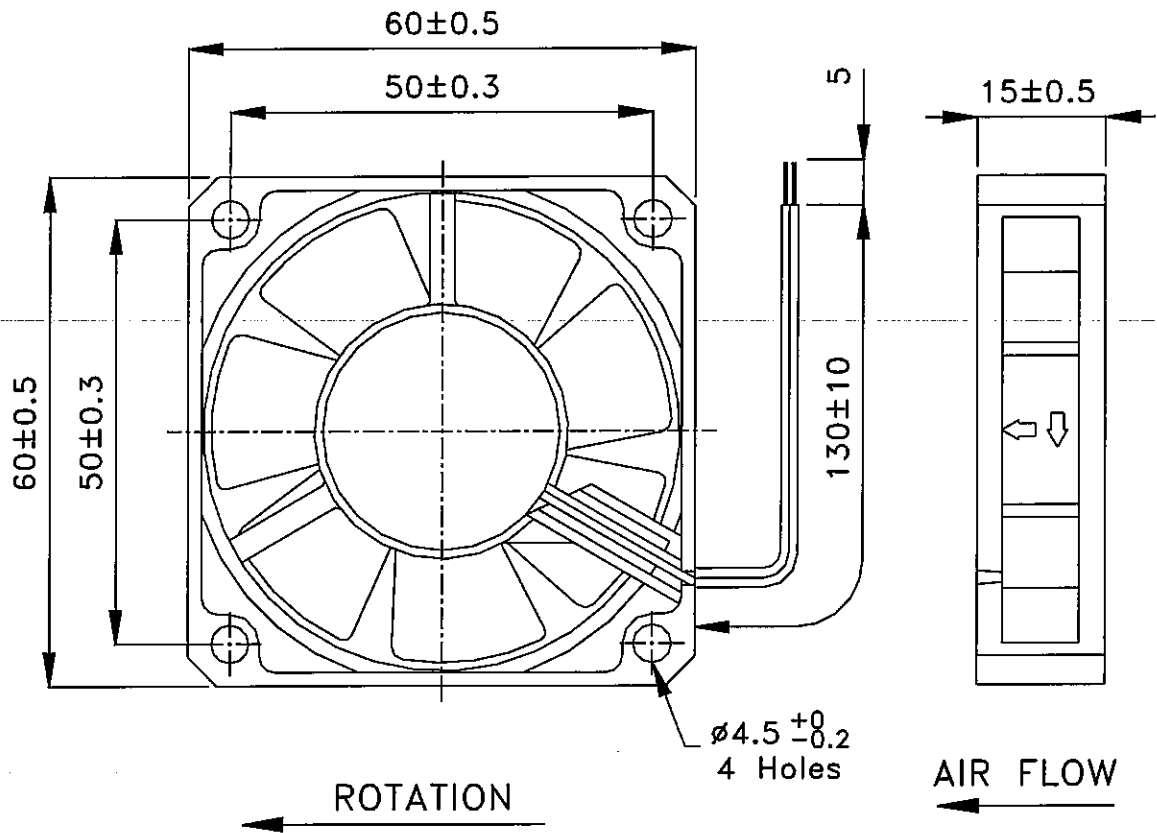

please do not touch and push Fan Blade with fingers or others.  
 Fan Blade and Ball Bearings may be damaged.  
 And it causes noise defect.

LEAD WIRES : UL 2468, AWG26 , L = 130+/- 10 MM  
 Red = positive ; Black = negative.



# Zertifikat Certificate



Zertifikat Nr. Certificate No.  
R 9955547

Blatt Page  
01

Ihr Zeichen Client Reference  
EK/SSI

Unser Zeichen Our Reference  
00144-TCC/ICL E9965893E01

Ausstellungsdatum Date of Issue  
16.11.1999 (day/month/year)

**Genehmigungsinhaber License Holder**

Adda Corporation  
6, East Section, Industry 6 Road  
Pingtung City 900  
TAIWAN


**Fertigungsstätte Manufacturing Plant**

Adda Corporation  
6, East Section, Industry 6 Road  
Pingtung City 900  
TAIWAN

**Prüfzeichen Test Mark**

Geprüft nach Tested acc. to

EN 60950:1992+A1+A2+A3+A4+A11



Zertifiziertes Produkt (Geräteidentifikation)  
Certified Product (Product Identification)

Lizenzentgelte - Einheit  
License Fee - Unit

VENTILATOR (Component DC Fan)

Bezeichnung : ADX1X2X3X4 -X5X6GL  
(Type Designation)

5

X1 steht für (stands for): 06 oder (or) 12

1

X2 steht für (stands for): 12 oder (or) 24

1

X3 steht für (stands for): H, M oder (or) L

1

X4 steht für (stands for): S, X oder (or) B

1

X5 steht für (stands for): D, C oder (or) A

1

X6 steht für (stands for): 70, 71 oder (or) 76

1

Nennspannung : siehe Aufbau-Übersicht  
(Rated Voltage) (see Construction Dataform)

Nennstrom : siehe Aufbau-Übersicht  
(Rated Current) (see Construction Dataform)

Schutzklasse : III  
(Protection Class)

Hinweis: Dieses Ausweisblatt ersetzt R 9955547, Blatt 01 vom 04.11.1999. (Remark: This license sheet replaces R 9955547, sheet 01 dated 04.11.1999.)



ANLAGE (Appendix): 1

11

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde.  
Das Produkt entspricht den o.g. Anforderungen, die Herstellung wird überwacht.  
This certificate is based on our Testing and Certification Regulation. The product fulfills above mentioned requirements; the production is subject to surveillance.

Zertifizierungsstelle



TÜV Rheinland Product Safety GmbH, Am Grauen Stein, D-51105 Köln

Dipl.-Ing. A. Klinker