



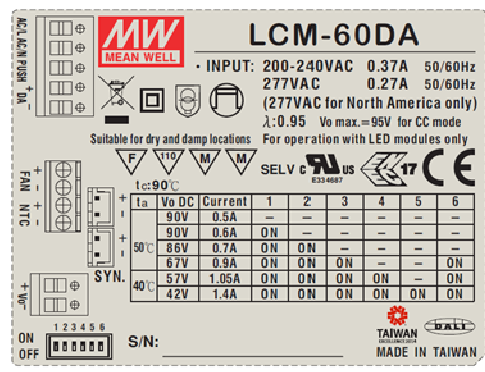
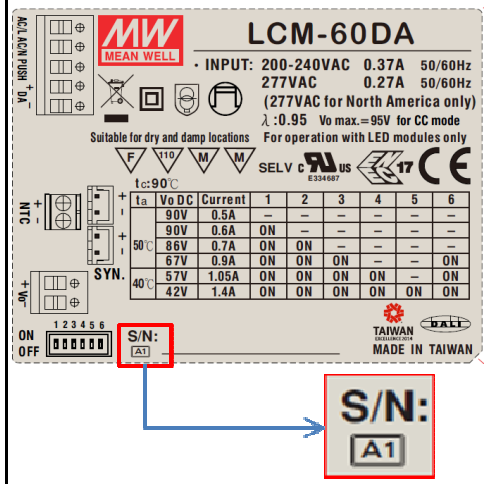
Product Revision Notice-Version Change of LCM-40DA/60DA

2014.03.11

In order to fulfill the requirement for lighting systems, MEAN WELL upgrades the LCM-40DA/60DA series by shortening the setup time from its original “1200ms/230VAC” to “500ms/230VAC”. In addition, to meet the latest ErP requirement for end lighting systems about no load power consumption <0.5W, the existing auxiliary output “12V/50mA” needs to be canceled.

If there are any demands for the application of auxiliary power, the modified models may be offered; nevertheless, please acknowledge these modified models will not meet the no load power consumption requirement, which is less than 0.5W. There will be a transition period after launching the new version of products, if you have any questions, please contact your sales representative. For more details, please refer to the information as below:

1. Schedule Date of Complete Implementation: Production batch after 2014.03.17
2. Revision Details:

Item	Before	After
Product Version	Blank	A1
label		
Setup Time	1000ms/230VAC	500ms @230VAC
Auxiliary Power	12V/50mA	None
No Load Power Consumption	<1.2W	<0.5W