



EC3AW SERIES

3 WATT 4:1 INPUT RANGE

DC-DC CONVERTERS



FEATURES

- * 3W Isolated Output
- * DIP-24/SMD Package
- * Efficiency to 77%
- * 4:1 Input Range
- * Regulated Outputs
- * Pi Input Filter
- * Continuous Short Circuit Protection



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	CASE
				NO LOAD	FULL LOAD		
EC3AW01	9-36 VDC	5 VDC	600 mA	15 mA	174 mA	72	DIP-24
EC3AW02	9-36 VDC	12 VDC	250 mA	15 mA	165 mA	76	DIP-24
EC3AW03	9-36 VDC	15 VDC	200 mA	15 mA	165 mA	76	DIP-24
EC3AW04	9-36 VDC	±5 VDC	±300 mA	25 mA	179 mA	70	DIP-24
EC3AW05	9-36 VDC	±12 VDC	±125 mA	25 mA	174 mA	72	DIP-24
EC3AW06	9-36 VDC	±15 VDC	±100 mA	25 mA	174 mA	72	DIP-24
EC3AW07	9-36 VDC	3.3 VDC	600 mA	15 mA	117 mA	70	DIP-24
EC3AW11	18-72 VDC	5 VDC	600 mA	7.5 mA	87 mA	72	DIP-24
EC3AW12	18-72 VDC	12 VDC	250 mA	7.5 mA	81 mA	77	DIP-24
EC3AW13	18-72 VDC	15 VDC	200 mA	7.5 mA	81 mA	77	DIP-24
EC3AW14	18-72 VDC	±5 VDC	±300 mA	12 mA	88 mA	71	DIP-24
EC3AW15	18-72 VDC	±12 VDC	±125 mA	12 mA	87 mA	72	DIP-24
EC3AW16	18-72 VDC	±15 VDC	±100 mA	12 mA	87 mA	72	DIP-24
EC3AW17	18-72 VDC	3.3 VDC	600 mA	7.5 mA	58 mA	70	DIP-24

NOTE: 1. Nominal Input Voltage 24 or 48 VDC

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range 24V 9-36V
 48V 18-72V
 Input Filter Pi Type

OUTPUT SPECIFICATIONS:


Voltage Accuracy ±2.0% max.
 Voltage Balance (Dual) ±1.0% max.
 Temperature Coefficient ±0.05%/°C
 Ripple & Noise, 20MHz BW Single & ±5V 100mV pk-pk max.
 Dual 1% pk-pk max.
 Short Circuit Protection Continuous
 Line Regulation Single/Dual (note1) ±0.5% max.
 Load Regulation Single (note2) ±0.5% max.
 Dual (note3) ±1.0% max.

GENERAL SPECIFICATIONS:

Efficiency See Table
 Isolation Resistance 10⁹ ohm min.
 Switching Frequency 100KHz min.
 Operating Ambient Temperature Range -25°C to +71°C
 De-rating, Above 71°C (Plastic Case) Linearly to Zero power at 95°C
 De-rating, Above 71°C (Copper Case) Linearly to Zero power at 100°C
 Case Temperature (Plastic case note6) 95°C max.
 (Copper case note6) 100°C max.
 Cooling Natural Convection
 Storage Temperature Range -40°C to +100°C
 Dimensions DIP 1.25x0.80x0.40 inches(31.8x20.3x10.2 mm)
 SMD 1.25x0.80x0.45 inches(31.8x20.3x11.4 mm)
 Weight 12.5g

Case A Dimensions:

NOTE: Pin Size is 0.02±0.002 Inch (0.5±0.05 mm) DIA
 All Dimensions In Inches (mm)
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

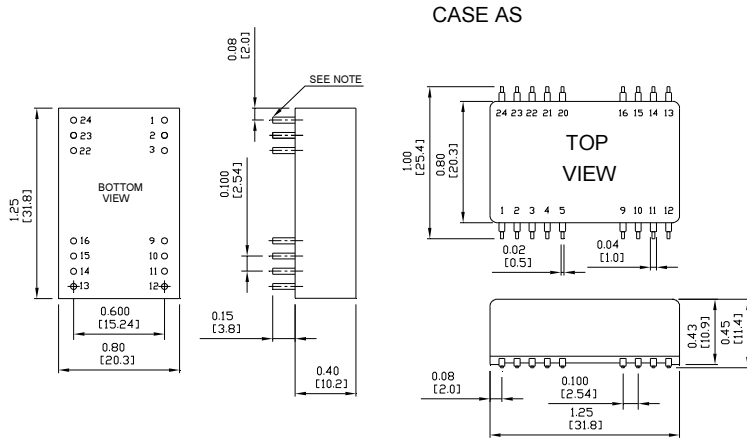

ISOLATION VOLTAGE:


500 VDC min. Standard Models
 3K VDC min. (note4) Suffix "H" Models
 1.5K VDC min. Suffix "HM" Models

CASE MATERIAL:

Standard Models Non-Conductive Black Plastic
 Suffix "M" Models (note 5) Black Coated Copper with Non-conductive Base

NOTE:

1. Measured from high line to low line.
2. Measured from full load to 10% load.
3. Measured from full load to 1/4 load.
4. Non-Conductive black plastic only.
5. Suffix "S" to the model number with SMD packages.
6. Maximum case temperature under any operating condition should not be exceeded 95°C (Plastic Case), 100°C (Copper Case).

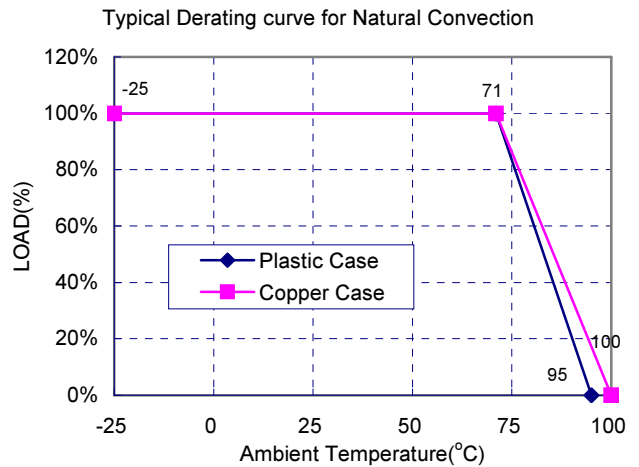

PIN CONNECTION									
Pin	500 VDC				1.5K & 3K VDC				
	Single Output	Dual Output	DIP	SMD	Pin	Single Output	Dual Output		
1,24	+V Input	+V Input	1,24	NP	NC	NP	NC		
2,23	NC	-V Output	2,3	-V Input		-V Input			
3,22	NC	Common	4,5	NP	NC	NP	NC		
4	NP	NC	NP	NC	9	NC	Common		
5	NP	NC	NP	NC	10,15	NC	NC		
9	NP	NC	NP	NC	11	NC	-V Output		
10,15	-V Output	Common	12,13	NP	NC	NP	NC		
11,14	+V Output	+V Output	14	+V Output		+V Output			
12,13	-V Input	-V Input	16	-V Output		Common			
16	NP	NC	NP	NC	20,21	NP	NC	NP	NC
20,21	NP	NC	NP	NC	22,23	+V Input		+V Input	

* NP-NO PIN
 * NC-NO CONNECTION WITH PIN