


KW4-561C2N

DATA SHEET

Package Dimensions:

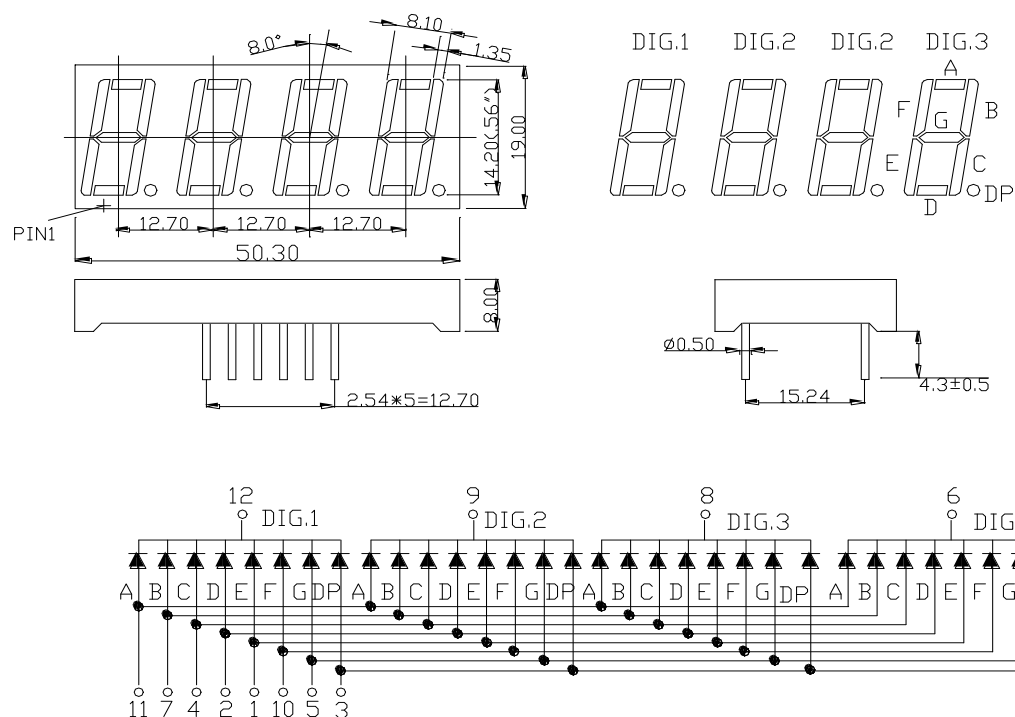

Part NO.	Chip Material	Source Color	Face	Segment
KW4-561C2N	GaP	Green	Gray	White

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
3. Specifications are subject to change without notice.

RED POWER

Absolute Maximum Ratings at Ta=25°C

Parameter	MAX.	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	40	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +80°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	7	15	25	mcd	I _f =20mA (Note 1)
Peak Emission Wavelength	λ _p	563	568	573	nm	I _f =20mA
Spectral Line Half-Width	△λ	25	30	35	nm	I _f =20mA
Forward Voltage	V _f	1.7	2.2	2.6	V	I _f =20mA
Reverse Current	I _R	---	---	100	μA	V _R =5V

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.


Part No.	KW4-561C2N	Spec No.	S/N-040217001D	Page	3 of 4
----------	------------	----------	----------------	------	--------

RED POWER


Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

Spectral Radiance (Peak @ 568nm)

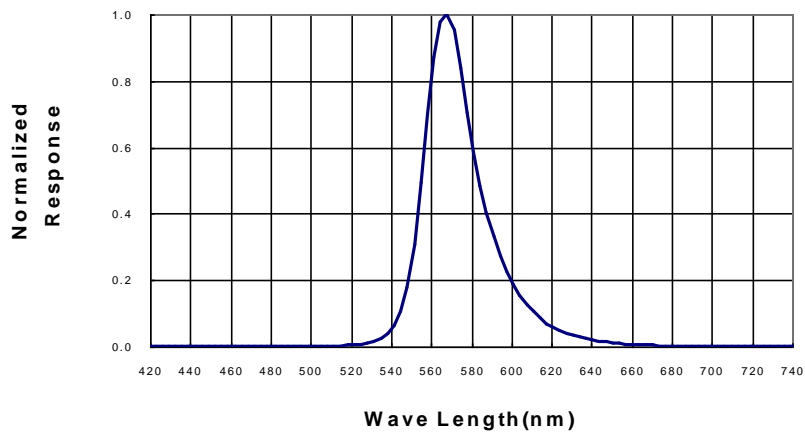

**Forward Current
vs Forward Voltage**

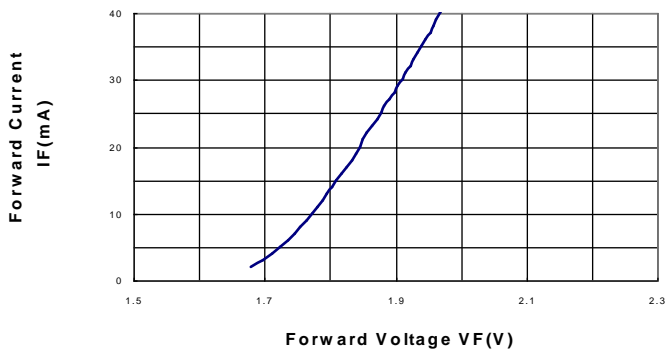

**Relative Luminous Intensity
vs Forward Current**

