

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 652949

Axial Lead and Cartridge Fuses

Glass Body

3AG Fast-Acting Type 312/318 Series



A standard for cost-effective reliability and performance in circuit protection, the 3AG fuse satisfies a broad range of application requirements.

ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Ampere Rating	Opening Time
100%	1/32–35	4 hours, Minimum
135%	1/32–35	1 hour, Maximum
200%	1/32–10	5 sec., Maximum
	12–30	10 sec., Maximum
	35	20 sec., Maximum

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA through 30 amperes.

1/100–10 amperes listed to UL 248-14 (UL 198-G)

12–30 amperes listed to UL 275.

AGENCY FILE NUMBERS: UL E10480, CSA LR 29862.

INTERRUPTING RATING:

10,000A @ 125VAC

35A @ 250VAC


ORDERING INFORMATION:

Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating	Voltage Rating	Nominal Resistance Cold Ohms	Nominal Melting I ² t A ² Sec.
312.031	318.031	1/32	250	23.3	0.0000300
312.062	318.062	1/16	250	24.5	0.000249
312.100	318.100	1/10	250	11.2	0.00102
312.125	318.125	1/8	250	7.10	0.00289
312.150	318.150	15/100	250	5.10	0.00550
312.175	318.175	.175	250	3.85	0.00960
312.187	318.187	3/16	250	3.40	0.0128
312.200	318.200	2/10	250	3.00	0.0165
312.250	318.250	1/4	250	2.00	0.0355
312.300	318.300	3/10	250	1.40	0.0689
312.375	318.375	3/8	250	0.820	0.185
312.500	318.500	1/2	250	0.495	0.483
312.600	318.600	6/10	250	0.360	0.880
312.750	318.750	3/4	250	0.243	1.84
312.001	318.001	1	250	0.189	0.760
312.1.25	318.1.25	1 1/4	250	0.138	1.45
312.01.5	318.01.5	1 1/2	250	0.103	2.35
312.01.6	318.01.6	1 9/10	250	0.0930	2.80
312.1.75	318.1.75	1 3/4	250	0.0850	3.60
312.01.8	318.01.8	1 8/10	250	0.0820	3.85
312.002	318.002	2	250	0.0700	5.20
312.2.25	318.2.25	2 1/4	250	0.0590	7.20
312.02.5	318.02.5	2 1/2	250	0.0510	9.54
312.003	318.003	3	250	0.0424	14.0
312.004	318.004	4	250	0.0291	28.5
312.005	318.005	5	250	0.0223	50.0
312.006	318.006	6	250	0.0177	81.1
312.007	318.007	7	250	0.0145	118.0
312.008	318.008	8	250	0.0121	166.0
312.010	318.010	10	250	0.00925	298.0
312.012	—	12	32	0.0071	—
312.015	—	15	32	0.0052	—
312.020	—	20	32	0.0034	—
312.025	—	25	32	0.0024	—
312.030	—	30	32	0.0019	—
312.035	—	35	32	0.0013	—




312 000 Series

318 000 Series

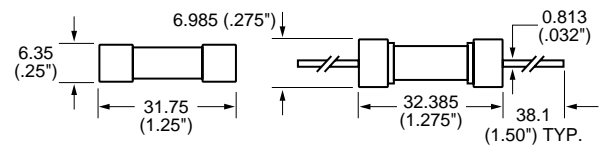

Axial Lead Material: Solder coated copper.

Average Time Current Curves

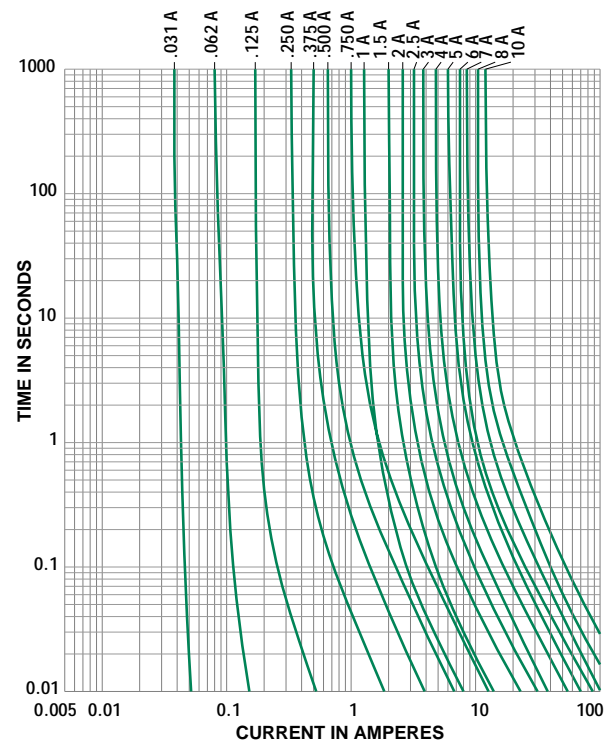

11
AXIAL LEAD AND
CARTRIDGE FUSES



Littelfuse®

3AG Fast-Acting Type
312/318 Series

