

MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

Preferred Devices

SWITCHMODE™ Power Rectifiers

This series are state-of-the-art devices designed for use in switching power supplies, inverters and as free wheeling diodes.

Features

- Ultrafast 25, 50 and 75 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 600 V
- Pb-Free Packages are Available*

Mechanical Characteristics:



- Case: Epoxy, Molded
- Weight: 1.9 Grams (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max for 10 Seconds



ON Semiconductor®

<http://onsemi.com>

ULTRAFAST RECTIFIERS 8.0 AMPERES, 50-600 VOLTS



TO-220AC
CASE 221B
PLASTIC

MARKING DIAGRAM



A = Assembly Location
Y = Year
WW = Work Week
U8xx = Device Code
xx = 05, 10, 15, 20, 40 or 60
G = Pb-Free Package
KA = Diode Polarity

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

MAXIMUM RATINGS

| Rating | Symbol | MUR | | | | | | Unit |
|--|---------------------------------|-------------|-----|-----|-----|-----|-----|------------------|
| | | 805 | 810 | 815 | 820 | 840 | 860 | |
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V_{RRM} V_{RWM} V_R | 50 | 100 | 150 | 200 | 400 | 600 | V |
| Average Rectified Forward Current Total Device, (Rated V_R), $T_C = 150^\circ\text{C}$ | $I_{F(AV)}$ | 8.0 | | | | | | A |
| Peak Repetitive Forward Current (Rated V_R , Square Wave, 20 kHz), $T_C = 150^\circ\text{C}$ | I_{FM} | 16 | | | | | | A |
| Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz) | I_{FSM} | 100 | | | | | | A |
| Operating Junction Temperature and Storage Temperature Range | T_J, T_{stg} | -65 to +175 | | | | | | $^\circ\text{C}$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

THERMAL CHARACTERISTICS

| Rating | Symbol | MUR | | | | | | Unit |
|--|-----------------|-----|-----|-----|-----|-----|-----|--------------------|
| | | 805 | 810 | 815 | 820 | 840 | 860 | |
| Maximum Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 3.0 | | | 2.0 | | | $^\circ\text{C/W}$ |

ELECTRICAL CHARACTERISTICS

| Rating | Symbol | MUR | | | | | | Unit |
|--|----------|----------------|-----|-----|--------------|--------------|---------------|------|
| | | 805 | 810 | 815 | 820 | 840 | 860 | |
| Maximum Instantaneous Forward Voltage (Note 1) ($i_F = 8.0\text{ A}$, $T_C = 150^\circ\text{C}$) ($i_F = 8.0\text{ A}$, $T_C = 25^\circ\text{C}$) | V_F | 0.895 0.975 | | | 1.00 1.30 | 1.20 1.50 | V | |
| Maximum Instantaneous Reverse Current (Note 1) (Rated DC Voltage, $T_J = 150^\circ\text{C}$) (Rated DC Voltage, $T_J = 25^\circ\text{C}$) | i_R | 250 5.0 | | | 500 10 | | μA | |
| Maximum Reverse Recovery Time ($I_F = 1.0\text{ A}$, $di/dt = 50\text{ A}/\mu\text{s}$) ($I_F = 0.5\text{ A}$, $i_R = 1.0\text{ A}$, $I_{REC} = 0.25\text{ A}$) | t_{rr} | 35 25 | | | 60 50 | | ns | |

1. Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

MUR805, MUR810, MUR815, MUR820

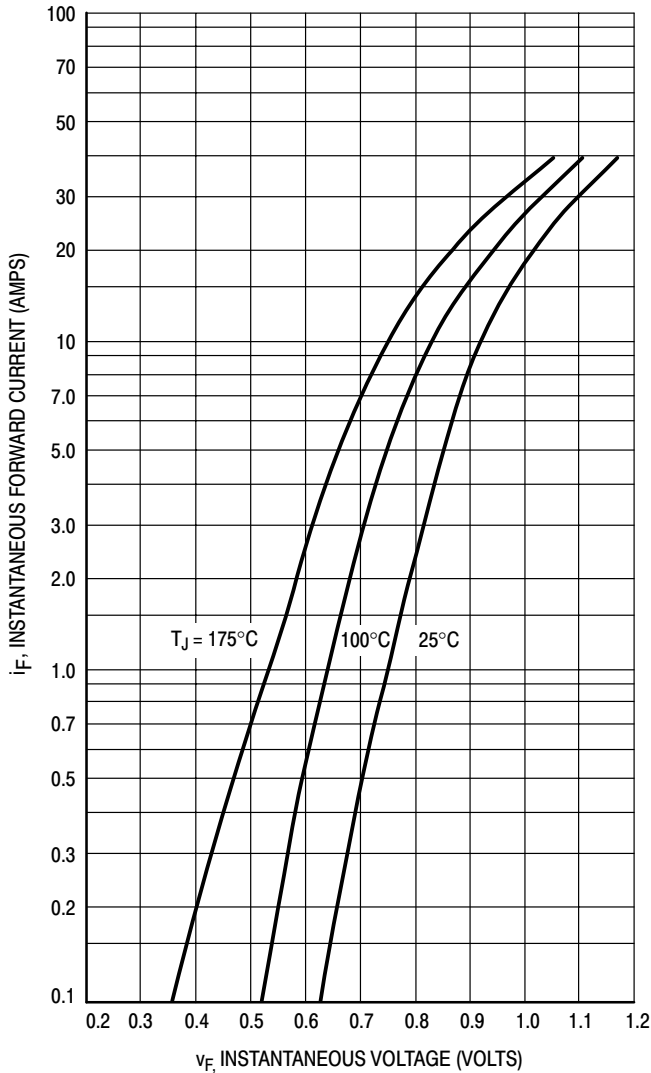


Figure 1. Typical Forward Voltage

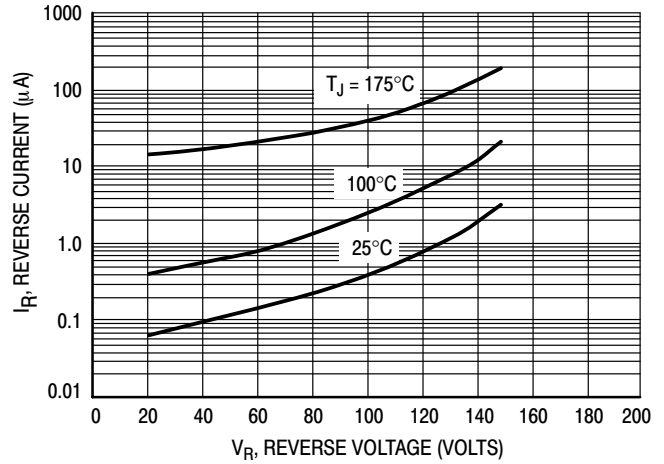


Figure 2. Typical Reverse Current*

* The curves shown are typical for the highest voltage device in the grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

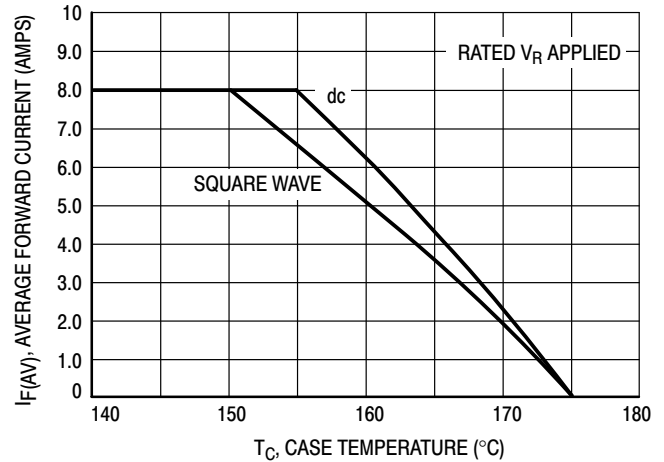


Figure 3. Current Derating, Case

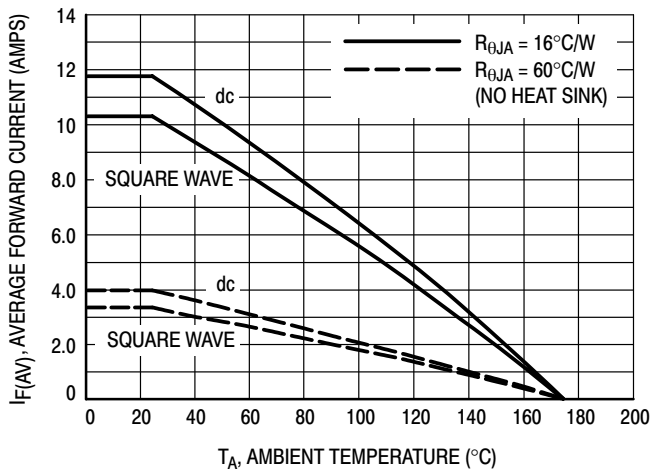


Figure 4. Current Derating, Ambient

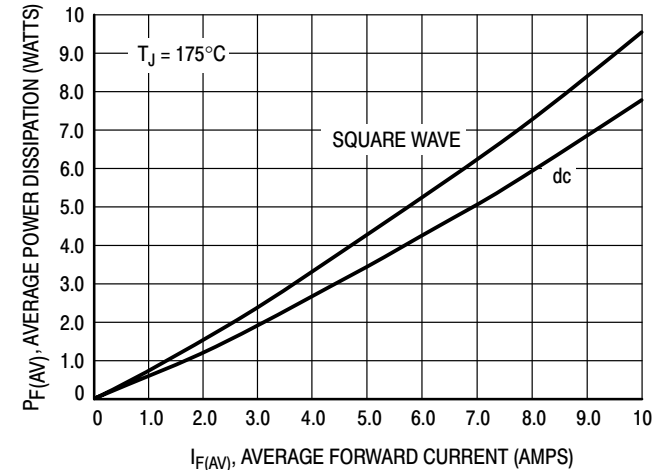


Figure 5. Power Dissipation

MUR840

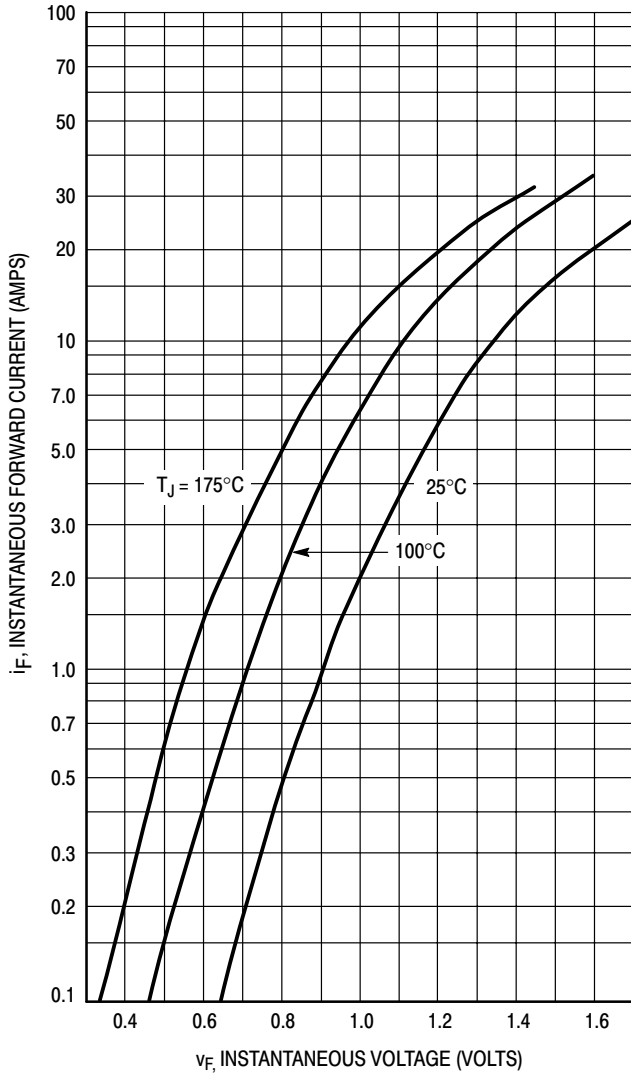


Figure 6. Typical Forward Voltage

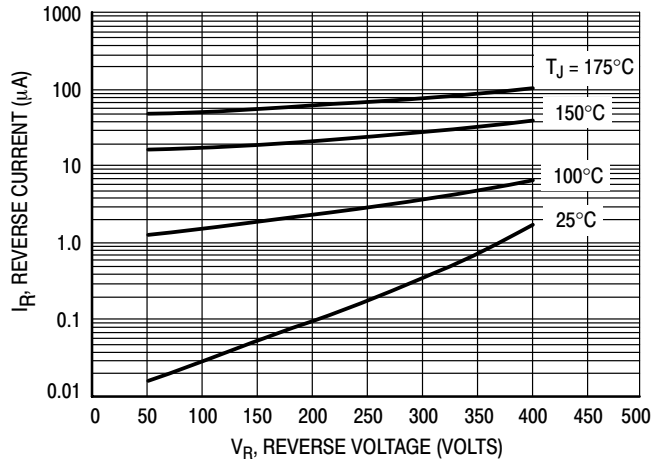


Figure 7. Typical Reverse Current*

* The curves shown are typical for the highest voltage device in the grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

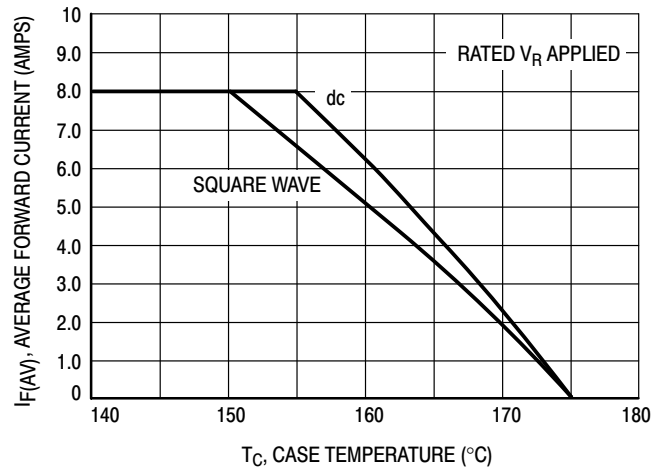


Figure 8. Current Derating, Case

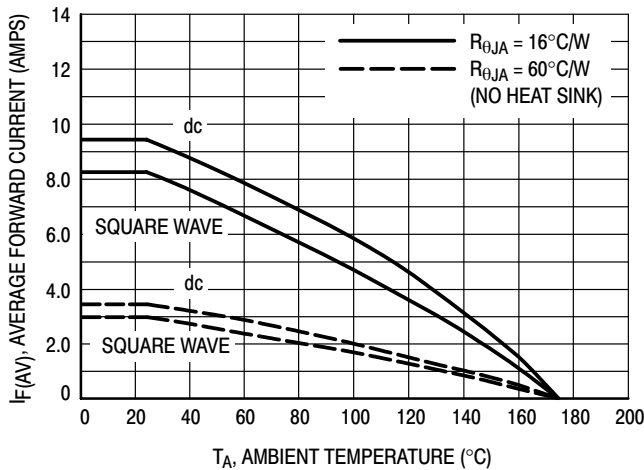


Figure 9. Current Derating, Ambient

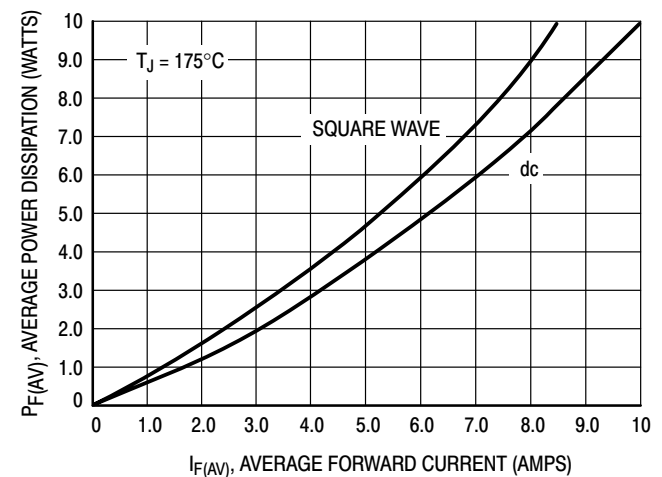


Figure 10. Power Dissipation

MUR860

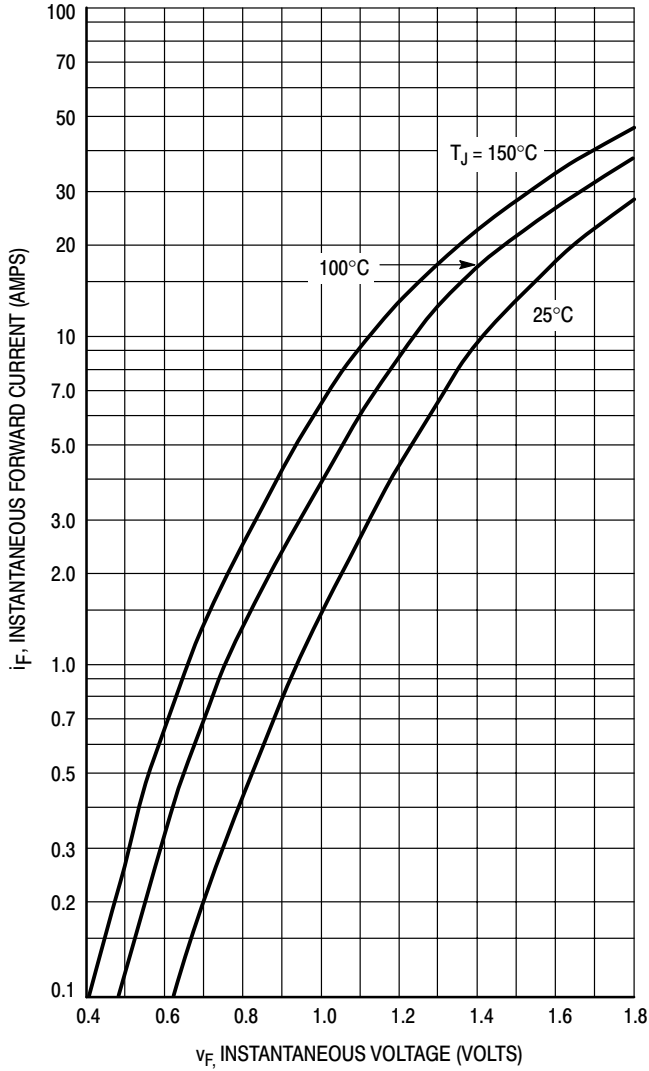


Figure 11. Typical Forward Voltage

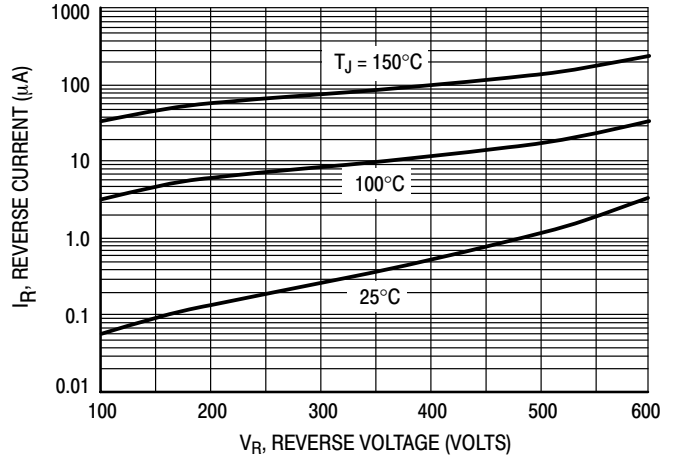


Figure 12. Typical Reverse Current*

* The curves shown are typical for the highest voltage device in the grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

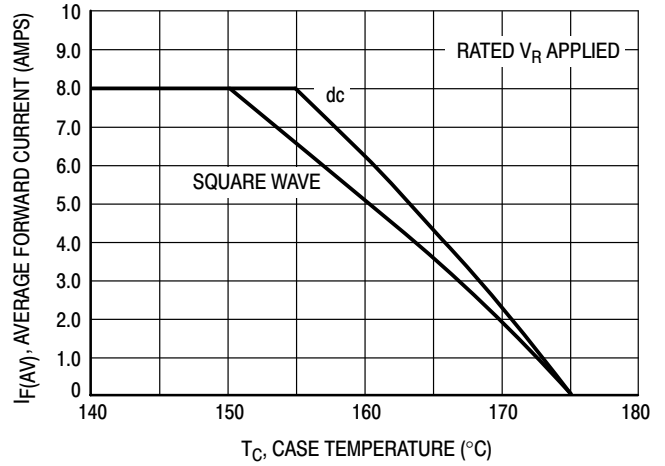


Figure 13. Current Derating, Case

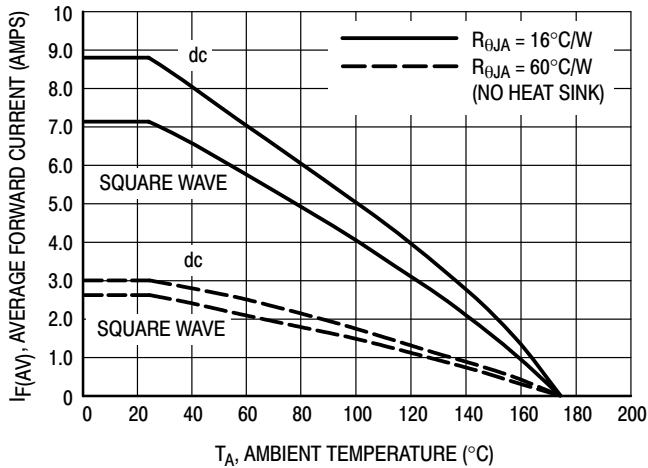


Figure 14. Current Derating, Ambient

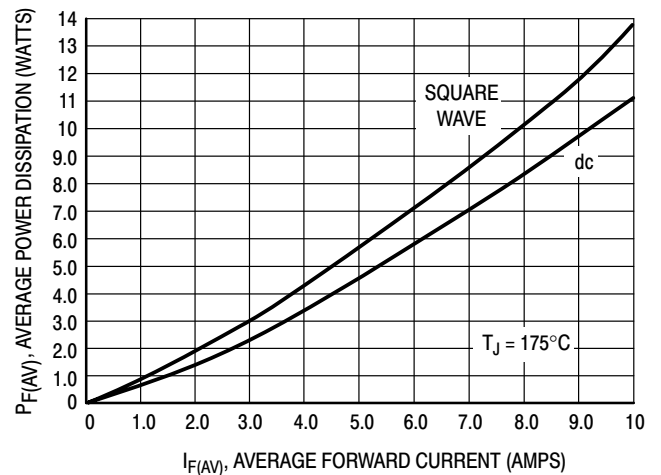


Figure 15. Power Dissipation

MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

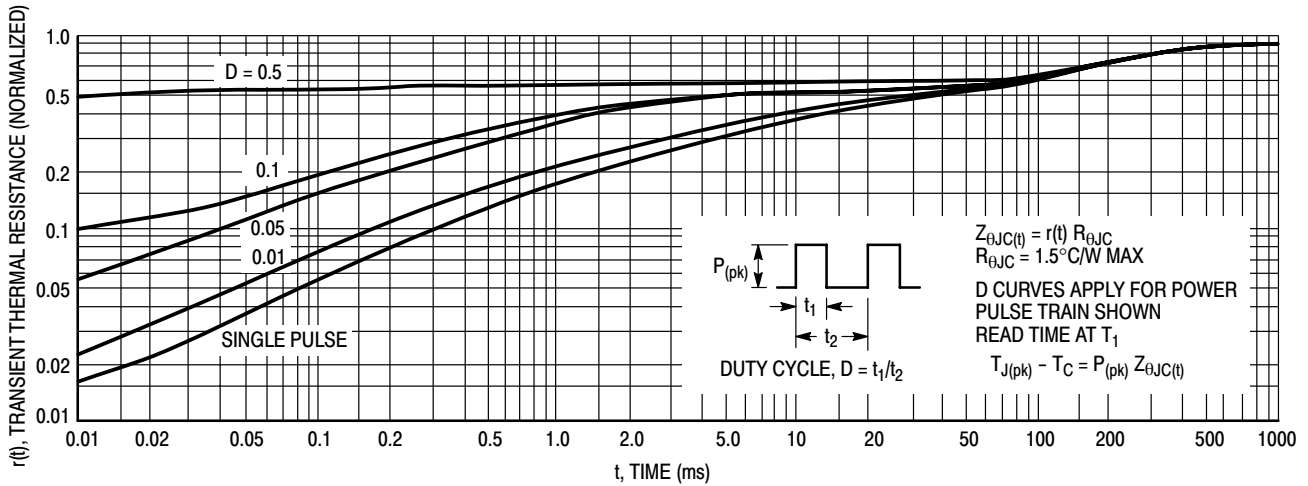


Figure 16. Thermal Response

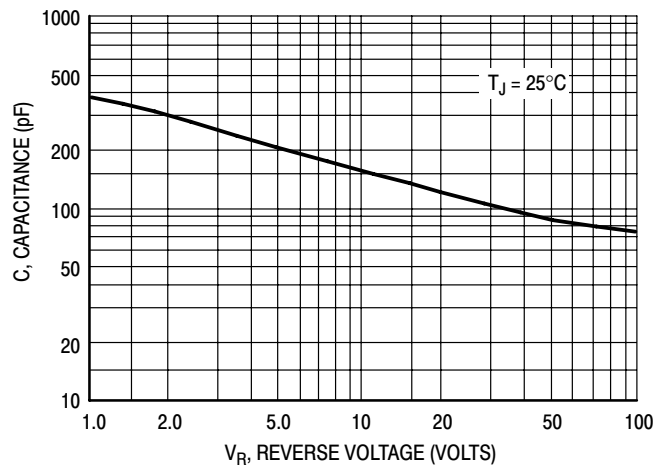


Figure 17. Typical Capacitance

ORDERING INFORMATION


| Device | Package | Shipping† |
|---------|---------------------|-----------------|
| MUR805 | TO-220 | 50 Units / Rail |
| MUR805G | TO-220 (Pb-Free) | |
| MUR810 | TO-220 | |
| MUR810G | TO-220 (Pb-Free) | |
| MUR815 | TO-220 | |
| MUR815G | TO-220 (Pb-Free) | |
| MUR820 | TO-220 | |
| MUR820G | TO-220 (Pb-Free) | |
| MUR840 | TO-220 | |
| MUR840G | TO-220 (Pb-Free) | |
| MUR860 | TO-220 | |
| MUR860G | TO-220 (Pb-Free) | |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

PACKAGE DIMENSIONS

TO-220 TWO-LEAD CASE 221B-04 ISSUE D

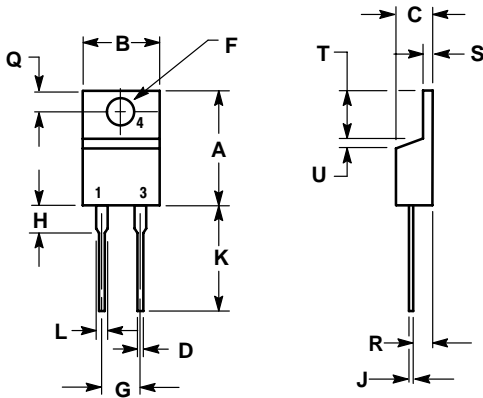


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.595 | 0.620 | 15.11 | 15.75 |
| B | 0.380 | 0.405 | 9.65 | 10.29 |
| C | 0.160 | 0.190 | 4.06 | 4.82 |
| D | 0.025 | 0.035 | 0.64 | 0.89 |
| F | 0.142 | 0.147 | 3.61 | 3.73 |
| G | 0.190 | 0.210 | 4.83 | 5.33 |
| H | 0.110 | 0.130 | 2.79 | 3.30 |
| J | 0.018 | 0.025 | 0.46 | 0.64 |
| K | 0.500 | 0.562 | 12.70 | 14.27 |
| L | 0.045 | 0.060 | 1.14 | 1.52 |
| Q | 0.100 | 0.120 | 2.54 | 3.04 |
| R | 0.080 | 0.110 | 2.04 | 2.79 |
| S | 0.045 | 0.055 | 1.14 | 1.39 |
| T | 0.235 | 0.255 | 5.97 | 6.48 |
| U | 0.000 | 0.050 | 0.000 | 1.27 |

SWITCHMODE is a trademark of Semiconductor Components Industries, LLC.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local
Sales Representative