

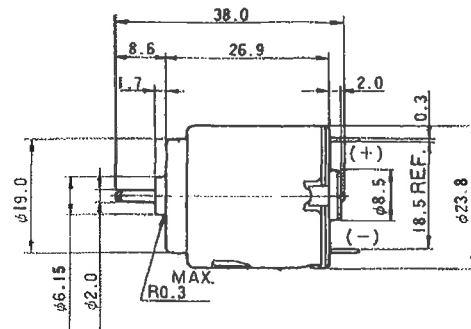





RE-260RA

DIRECTION OF ROTATION




UNIT: MILLIMETERS




WEIGHT: 28g (APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL TORQUE		
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE OZ-in	TORQUE g-cm	OUTPUT W	EFF. %	TORQUE OZ-in	TORQUE g-cm
RE-260RA-2670	1.5~3.0	1.5V CONSTANT	6300	0.160	5050	0.64	0.139	10.0	0.517	53.9	0.694	50.0
		3.0V CONSTANT	12250	0.200	10150	0.973	0.212	15.3	1.591	54.5	1.243	89.5
RE-260RA-2295	1.5~4.5	1.5V CONSTANT	4600	0.100	3600	0.361	0.103	7.38	0.273	50.4	0.472	34.0
		3.0V CONSTANT	9400	0.150	7600	0.636	0.185	13.4	1.042	54.6	0.972	70.0
RE-260RA-18130	1.5~4.5	1.5V CONSTANT	3300	0.075	2500	0.232	0.085	6.10	0.156	44.8	0.347	25.0
		3.0V CONSTANT	6900	0.095	5500	0.365	0.138	9.92	0.557	50.9	0.667	48.0


RE-260RA-2670※

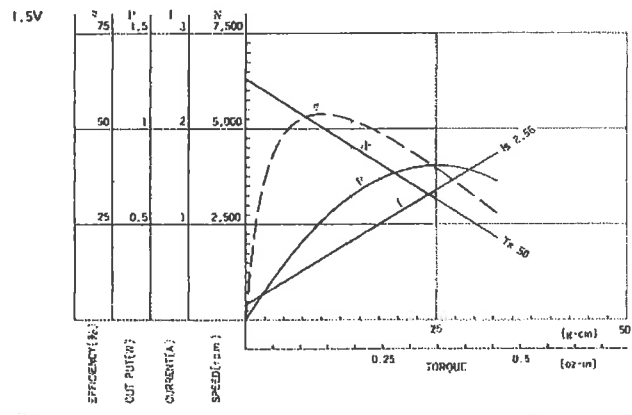

RE-260RA-2670※

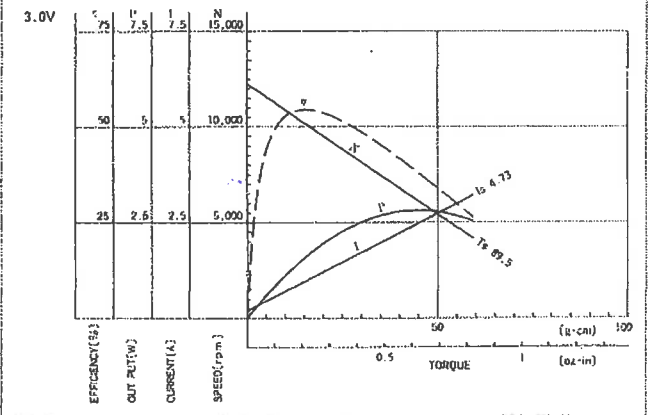

RE-260RA-2295

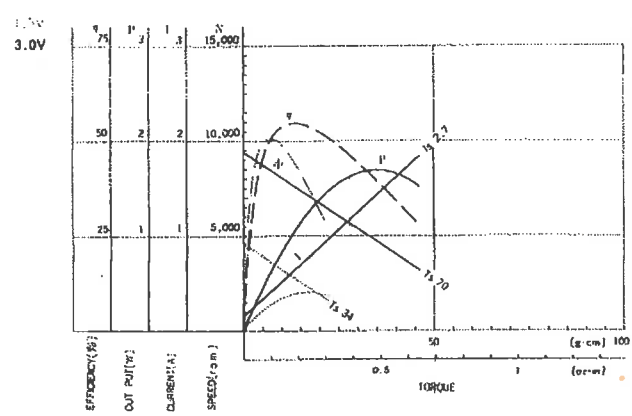

RE-260RA-18130

